

Calf Milk **Pasteurizer**

by Westward



High Capacity Unit

**Installation & Operation Manual
Control Center
(WPLGCC & WPLGCCHC)**

WESTWAARD
FABRICATORS for DARITECH

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	1/03/2013	Manual Completion
Rev. 1	9/26/2013	Corrections to part breakdowns
Rev. 2	6/6/2014	Updated layout & controls
Rev. 3	11/20/2014	High Capacity Control Center Added
Rev. 4	9/09/2016	Wiring Diagram Update
Rev. 5	4/13/2017	Updated control box layouts and input water regulator requirement

Table Of Contents

<i>Preface</i>	<i>1</i>
<i>Arrangement</i>	<i>2</i>
<i>Explanation of Symbols</i>	<i>2</i>
Section 1 – Safety	3
1.1 - Obligation of Care	3
1.2 - General	3
1.3 - Safety Precautions	3
Section 2 – Installation	4
2.1 Included Accessories	4
2.2 Connections	5
i. - Electrical.....	5
ii. - Wiring the Agitator	5
iii. - Wash / Water Line Hook-Ups.....	6
2.3 - Supplies Needed	7
2.4 - Mounting the Control Center	7
i. - In-field - Hook-Ups.....	8
ii. - In-field Requirements for Tank.....	9
Section 3 – Panel Controls	10
3.1 - Understanding Screen Layout	10
3.2 - Programming the Controls	10
3.3 - Operation Settings	11
i. - General Settings Screen.....	12
ii. - Pasteurizer Settings Screen	13
iii. - Wash Settings.....	16
iv. – Aux Input / Output Settings.....	17
v. - Service Menu Screen	18
3.7 Temperature recordings	19
i. – Pasteurize & Wash Cycle Graph	20
3.8 Completed Cycles	20
3.9 Menu Diagram	21
Section 4 – Operation	22
4.1 Pasteurization	22
i. Pre-cool Pasteurization	22
i. Pre-cool Pasteurization (continued)	24
ii. Reheat Pasteurization	24
ii. Reheat Pasteurization (continued)	25
iii. Manual Pasteurization	26
iii. Manual Pasteurization (continued)	27
4.2 Temperature Hold	27
4.2 Temperature Hold	28
4.4 Dispense Mode	29
Section 5 – Wiring Diagram / Control Cabinet List	30
Contact	36

Preface

These instructions are supplied with the equipment and;

- The purpose of this manual is to provide an overview of the safety & operation of this product.
- This manual is designed to be modular and is only in relation to the mentioned product.
- This manual should always be kept with or near the equipment even when the equipment is sold.
- It is the responsibility of the end user to test and maintain the unit to assure continued effectiveness of the machine.

Westwaard, reserves the right to make changes due to technical developments in the data and images in this manual.

Reproductions, translation and copies of any kind require written authorization from DariTech Inc or an authorized dealer.

Arrangement

This manual is arranged in 5 primary sections, with pages, paragraphs, figures, and tables numbered in sequence.

Section 1 – Safety

Section contains critical information essential to the safe operation of the machine & the user.

Section 2 – Installation

This section describes what needs to be done to install the Control center before it can commence operation.

Section 3 – Panel Controls

Section identifies and describes the process to program the pasteurizer Control center.

Section 4 – Operation

Section identifies and describes the operation of the pasteurizer Control center & gives an overview of what to expect when the unit is running properly.




Section 5 – Wiring Diagram

Covers control box layout and contains the wiring diagram schematics for the control box.

Explanation of Symbols

The following symbols are used within this manual to alert the reader to important information or potentially hazardous conditions.

Safety Symbols draw attention to adjacent text and should always be read and thoroughly understood.

	WARNING! Warning signals danger to life or health of personnel. Death or serious injury may result if the danger is not avoided.
	CAUTION! Caution signals dangerous situations. Injury may result if the danger is not avoided.
	ATTENTION! Attention signals important information on risks for product or the environment.

Section 1 – Safety

1.1 - Obligation of Care

This product has been designed and constructed while taking careful analysis and standards and other specifications to be compiled with to ensure a safe level of security.

This safety can only be achieved in practice when all of the necessary measures have been taken. It is part of the owner's obligation to plan and check these measures.

1.2 - General

The Westwaard Pasteurizer is built for on farm pasteurization of “waste” milk for the use of feeding calves. It, under no circumstance, is to be used as a pasteurizer for human consumption. It is designed as an economical, reliable, easy cleaning method for the dairyman to pasteurize and distribute waste milk for calves. It is in the responsibility of the end user to test and maintain the unit to assure continued effectiveness of pasteurization.

1.3 - Safety Precautions

- Read and understand the Operator's Manual and all safety signs before operating, servicing, adjusting, repairing, unplugging or filling the unit.
- Be sure all safety covers are in good condition and properly installed before operating.
- Properly disconnect unit from electrical power source when servicing.
- Know and respect the machinery, approach moving parts with caution.
- Understand the location and function of all machinery and controls.
- Keep hands, feet and clothing away from any moving parts.
- Never remove / leave exposed guards during operation.
- Always Lock out, Tag out machine when shutting down for maintenance.
- Always be attentive for machine malfunctions or unusual noises. These can indicate problems requiring immediate attention.
- Particular attention must be paid to any supplementary or auxiliary items wired or plumbed to the system (detergents, acids, etc).
- Keep the DOOR TO THE ELECTRICAL CABINET CLOSED! Only authorized personnel may open the door when maintenance is necessary.



Only qualified maintenance personnel should perform maintenance or troubleshooting operations!

For additional safety information you can find local safety procedures via the Web Sites below.

Location	Administrated by	Web Site
In Canada	Canadian Center for Occupational Health and Safety	www.ccohs.ca
In USA	Occupational Safety and Health Administration	www.osha.gov
In European Union	European Agency for Safety and Health at Work	www.europe.osha.eu.int

Section 2 – Installation

2.1 Included Accessories

Each Control Center unit will come with three attachments and the necessary items to install them. These items can be mounted to the dispensing hose and inside of the tank. These attachments connect to the unit using a cam lock for quick and easy connections.



Mounting clamp

The mounting clamp is welded to the tank with the 90° short cam end remaining outside the tank. At one end the mounting clamp connects the discharge hose to the pasteurizer tank while the other end is used to connect the spray ball and agitation pipe (see page. 8 for installation details).



Spray Ball

The agitation pipe attaches to the quick cam connection on the inside of the pasteurizer tank. The agitation pipe is used to agitate the calf milk inside the tank to maintain a consistent temperature throughout the tank while the calf milk is pasteurized. The pipe will need to be cut to fit and should be 6 inches off the bottom of the pasteurizer tank or enough off the bottom to insure that the pipe always discharges into liquid and doesn't create a splash.

The spray ball is used in the cleaning cycle for proper mixing of chemicals and rinsing. The spray ball, like the agitation pipe, connects to the quick cam connection on the inside of the pasteurizer tank.

The dispensing nozzle connects to the quick cam on the dispensing hose. The dispensing nozzle is used to transfer the pasteurized calf milk for distribution to calves.



Quick Cam
Hose
Attachment

The clear PVC hose is used to connect from the discharge on the control center to the quick cam hose attachment.

The quick cam hose attachment is used to change between agitation and cleaning cycles to dispensing. This cam lock makes it easy to switch between different accessories.

The Control center also comes with 3 1-in Tri-Clover hose barb fittings, 3 Tri-Clover rubber gaskets and 3 Tri-Clover clamps



Tri-Clover
Accessories



Agitation Pipe



Clear PVC
Hose

See part manual for replacements

2.2 Connections



ELECTRICAL SHOCK HAZARD - Before continuing ensure that all power sources to the unit are disconnected before proceeding with any wiring or electrical connections.

i. - Electrical

Control Center

20 Amp 240V AC single phase receptacle.

Control Center
High Capacity

30 Amp 240V AC single phase receptacle.




If wiring to a 240 VAC 3 phase system, care must be taken to make sure system is not wired into the high 3 phase leg.

ii. - Wiring the Agitator



The Control Center can support up to a 5 Amp Agitator and will need to be hard wired in-field.

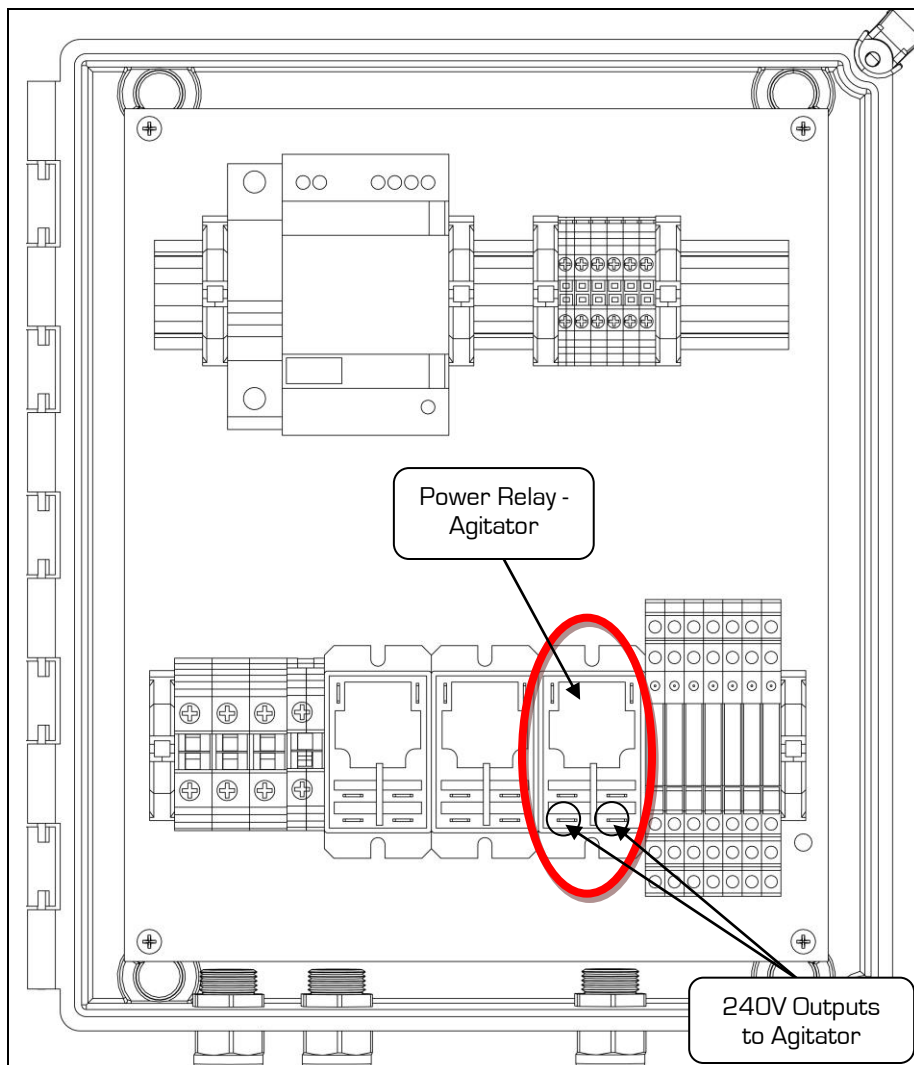


Control Box – Control Center

- The Power relay for the Pasteurizer Agitator is located inside the control cabinet.
- To access the power relay open up the control cabinet. The power relay, for the Agitator, will have six terminals and will be the far right power relay (circled in red).
- When wiring be sure to use the proper gauge wire. In this application 12 AWG is required.
- The two terminals located at the bottom of the power relay are each 240V output that will need to be wired to the Agitator before use.

**The Control Center can support up to a 5 Amp Agitator.*

Optional:

- *If wiring to Aux Input / Output for dispensing or remote components see section iv. – Aux Input / Output Settings on page 16 for wiring connections.*

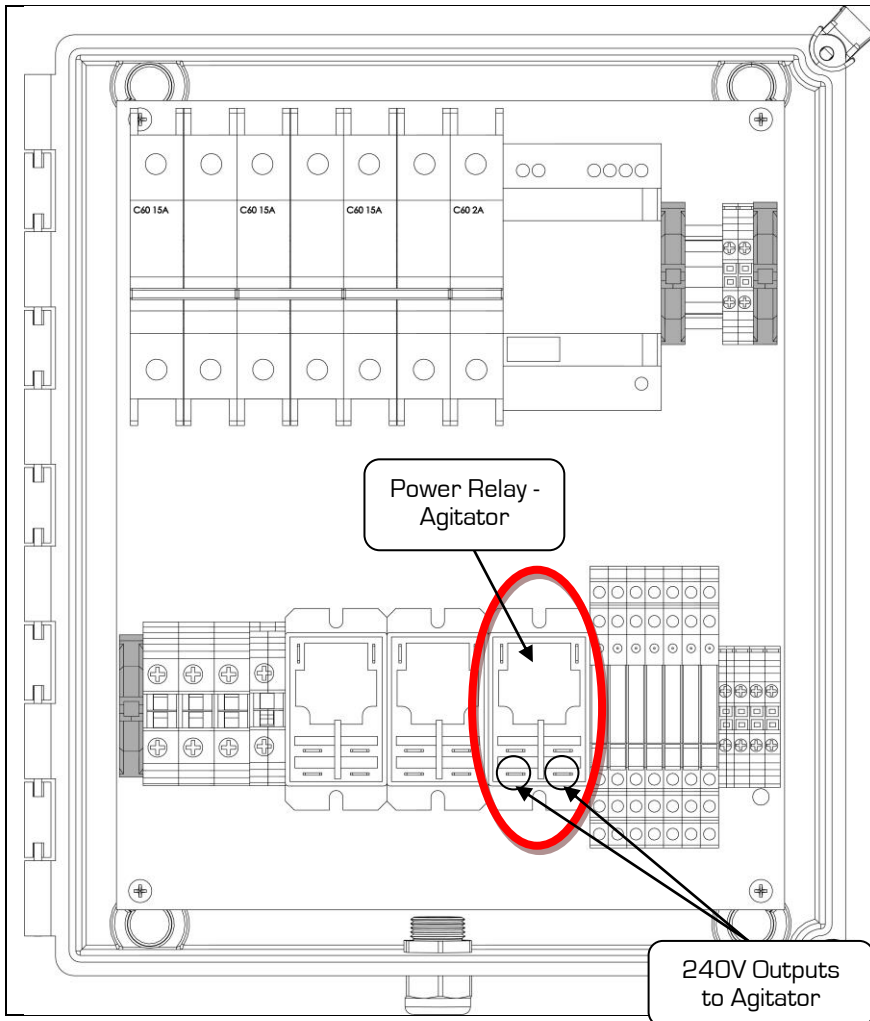

Control Box – High Capacity

- The Power relay for the Pasteurizer Agitator is located inside the control cabinet.
- To access the power relay open up the control cabinet. The power relay, for the Agitator, will have six terminals and will be the far right power relay (circled in red).
- When wiring be sure to use the proper gauge wire. In this application 12 AWG is required.
- The two terminals located at the bottom of the power relay are each 240V output that will need to be wired to the Agitator before use.

**The Control Center can support up to a 5 Amp Agitator.*


Optional:

- If wiring to Aux Input / Output for dispensing or remote components see section iv. – [Aux Input / Output Settings on page 17 for wiring connections.](#)

iii. - Wash / Water Line Hook-Ups

Located on the side of the control center & the high capacity control center are the hook-ups for the inlet / outlet lines. These hook-ups are indicated in the pictures below.

1. Hot Water Inlet (180°F Maximum water supply).
2. Cold Water Inlet.
3. Hot Water Outlet.
4. Cold Water Outlet.
5. Wash Inlet Cold.
6. Wash Inlet Hot.

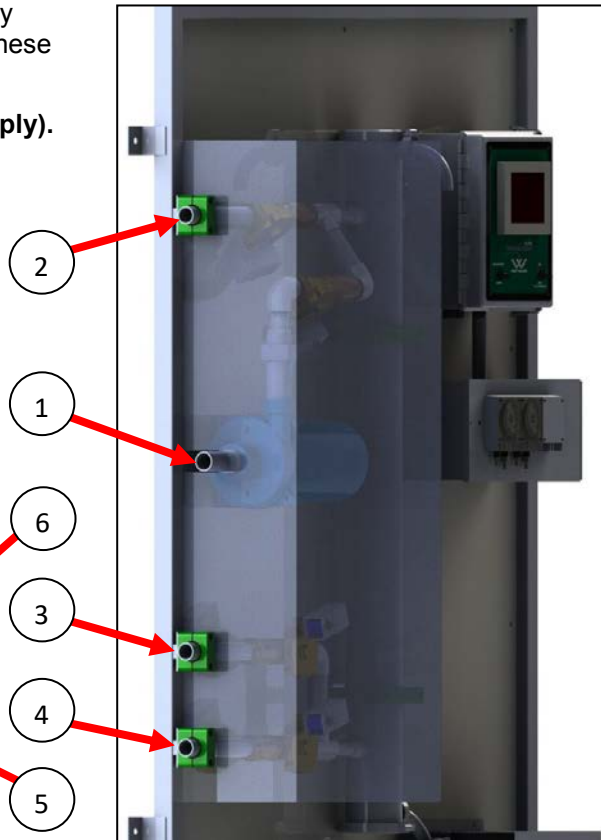

2.3 - Supplies Needed

Control Center (WPLGCC & WPLGCCHC)

<ul style="list-style-type: none"> Recommended a minimum of 100 gallon Water Heater with a rating of 200,000 BTU for up to 150 gallon tank. Water Heater tank sizing dependent on a short or long term demand. Short term water heater's have larger storage and are generally good for use at 1-hour intervals, but once the heated storage runs out the recovery time suffers. Long term water heater's have little storage, thus less water to heat and greatly increasing recovery time, but generally cost more to operate. 	1 per unit						
<table border="0"> <tr> <td style="text-align: center;"><u>Short Demand</u></td> <td style="text-align: center;"><u>Long Demand</u></td> </tr> <tr> <td>•Min Recovery</td> <td>•Max Recovery</td> </tr> <tr> <td>•Max Storage</td> <td>•Min Storage</td> </tr> </table>	<u>Short Demand</u>	<u>Long Demand</u>	•Min Recovery	•Max Recovery	•Max Storage	•Min Storage	
<u>Short Demand</u>	<u>Long Demand</u>						
•Min Recovery	•Max Recovery						
•Max Storage	•Min Storage						
<ul style="list-style-type: none"> For recommendations on larger capacity pasteurizer tanks call: DARITECH Inc. @ (360) 354-6900 							
<ul style="list-style-type: none"> Expansion Tank for Water Heater 	1 per Water Heater						
<ul style="list-style-type: none"> 1" line for runs up to 50' when installing from Heating Water in & Warm Heating Water out. For runs greater than 50', sizing for line loss will need to be considered. Heating Water runs on a closed loop and 1" line insures 30GPM in a run of 50' or less. 	1" line for runs of 50' or less						
<ul style="list-style-type: none"> Minimum 1" line for Cold inlet / outlets Minimum of 1/2" line on Wash Hot / Cold inlets 							
<ul style="list-style-type: none"> Fittings, Tees and mounting brackets for all lines 	Dependent on installation						
<ul style="list-style-type: none"> Bolts for mounting Control Center 	4 @ 1/2" Fasteners						
Input water pressure regulator (Required if risk of incoming water pressure exceeding 75psi)	1 per unit						


2.4 - Mounting the Control Center

Decide where you want to mount the Control Center. Identify the location of a wall able to support the weight of the Control Center (~400lbs). You will want the pump to be as low to the ground as possible.

When choosing a location, close proximity to the tank valve must be taken into consideration to ensure proper suction to the Control Center. Keep in mind the mounting brackets on the Control Center are spaced 53" on center, additional support may need to be added to the wall to accommodate for this spacing. Using the Control Center as a template, level the unit and mark the mounting bracket hole locations. Finally, hang the Control Center to the wall. Position the control center in place and securely fasten the unit to the wall.

i. - In-field - Hook-Ups

Now that the Control Center is mounted to the wall it will need to be plumbed. The inlet / outlets are located on the sides of the control center and are depicted in the diagram below.

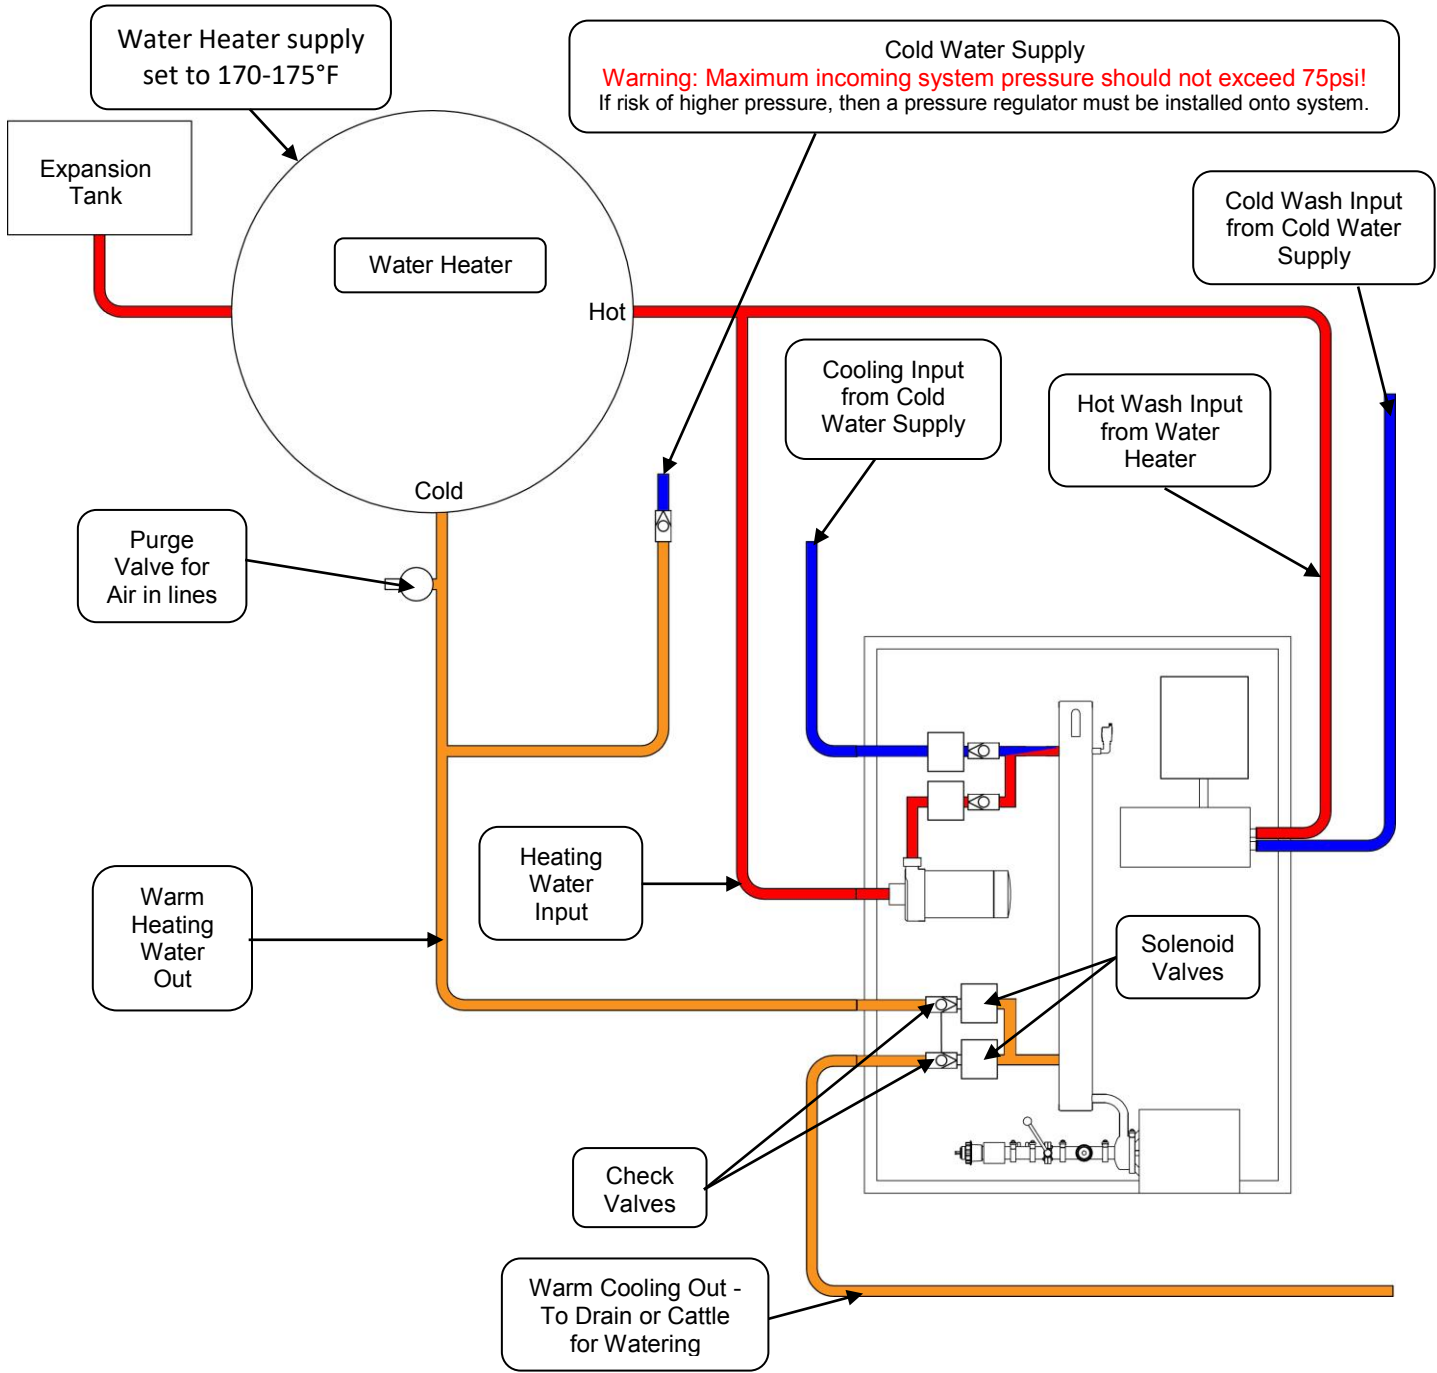

Water temperatures reaching or exceeding 180°F can damage the solenoids valves and exceeding temperatures may rupture the water heater causing serious injury.

Once plumbed properly, check for leaks and correct if any are found.

ii. - In-field Requirements for Tank





This page is in direct reference to the associated items found of page 4. For a list of these items mentioned below as well as the included accessories please see p.4 or the part manual for further reference.




The Mounting Clamp must be installed and welded to the top of the pasteurizer tank before the Control Center can be used.

- Find a location that is close to the center and on top of the pasteurizer tank that can be easily accessible from the inside and outside.
- You will want easy access for changing out attachments.
- A 1½" hole will need to be cut into the pasteurizer tank.
-Clean surface and prepare to weld the Mounting Clamp.

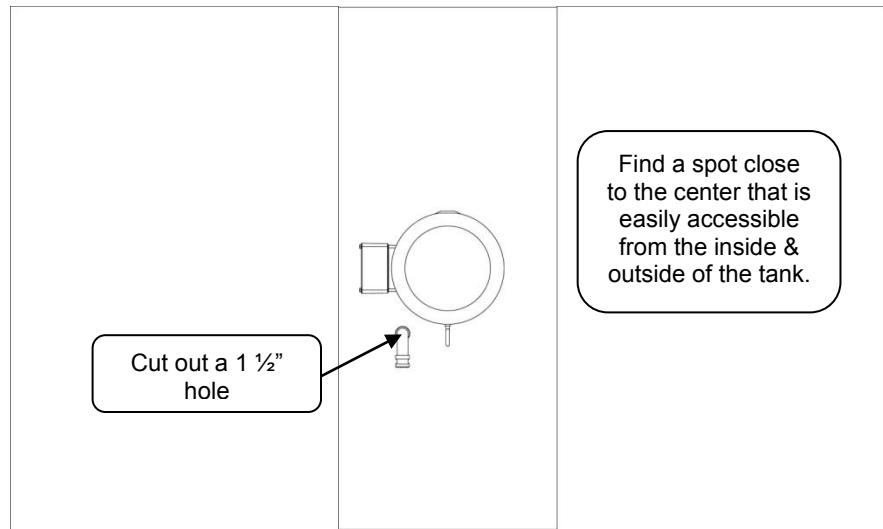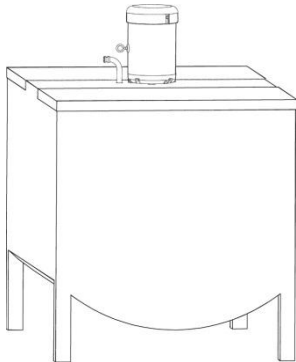

Insert Mounting Clamp and Weld in place.

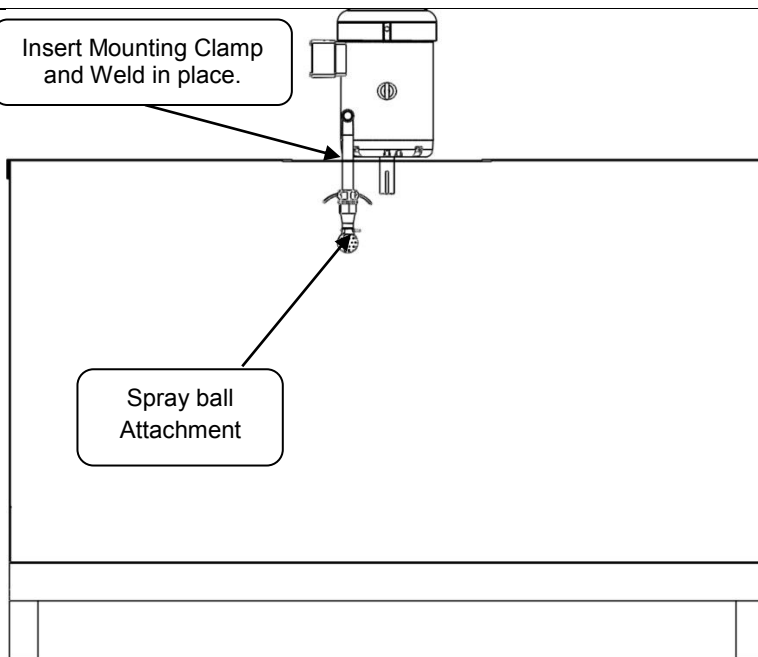

- Insert the longer end of the Mounting Clamp and measure 3" down from top of the tank.
- Weld in place.
- Once Welded, attach the Dispensing hose.
- Before use, the Circulation Pipe (p.35) will need to be cut to fit.
- The Circulation Pipe should be cut so that it is 6 inches off the bottom of the pasteurizer tank or enough off the bottom to insure that the pipe always discharges into liquid and doesn't create splash.
- Once done the Control Center will be ready to use.

Section 3 – Panel Controls

3.1 - Understanding Screen Layout

This unit is touch screen operated, to operate simply touch the screen where you want to navigate with your index finger to be taken to the selected subject.

3.2 - Programming the Controls

All the programming for the PLC is done via the settings menu. The menu is only accessible from the Home screen when the selector switch is in the off position.




- Turn selector switch to the off position. This will take you to the home screen.
- The Main Menu screen will display the current temperature of the Pasteurizer in the bottom right hand corner.
- Press the “Settings” button at the bottom left of the screen to bring up the settings screen menu.


In the settings menu you can navigate to one of four other menus; Operation Settings, Factory Configuration Settings, Temperature Recordings, and completed Cycles.

Please note that the “Factory Configuration Settings” is for advanced use only and should only be changed under the advice of a dealer or trained technician.

Continue on to Operation Settings

- Press “*Operation Settings*” to bring up the Operation settings screen.

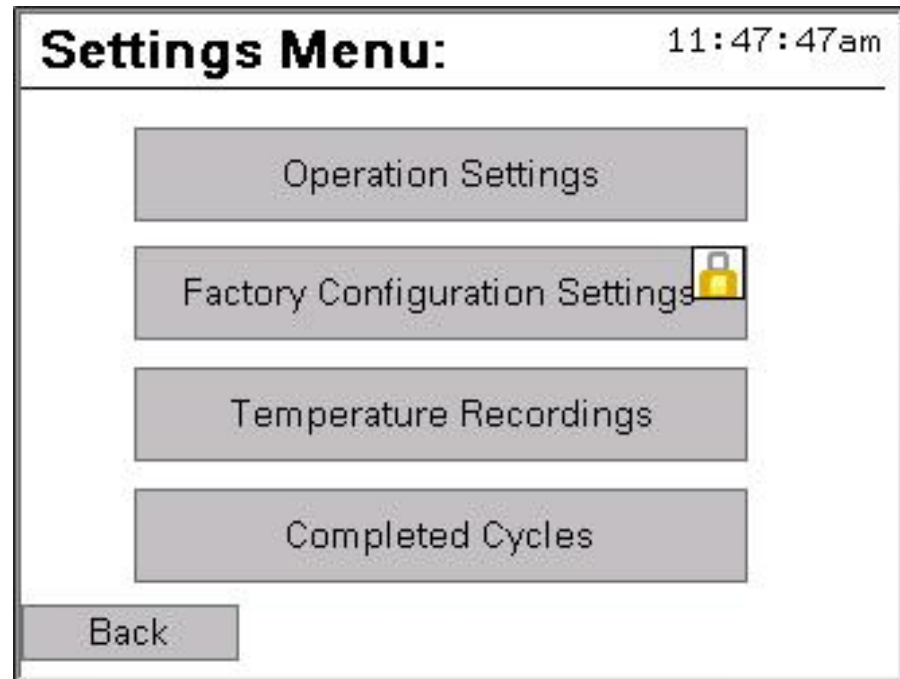

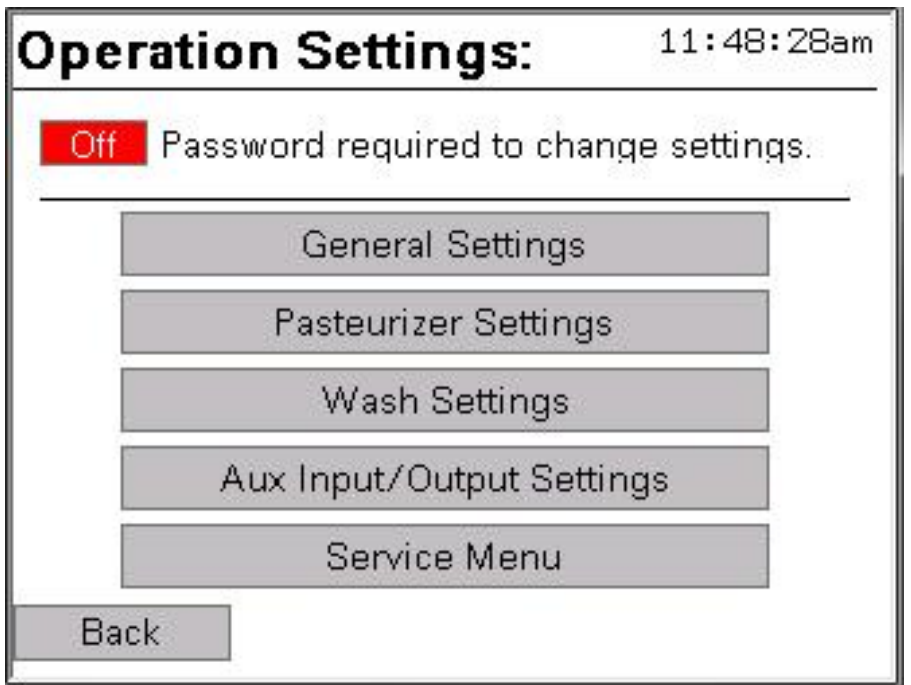

• From this screen you can change the operating parameters for the pasteurizer.

If a password is required enter the following;

• Enter in **1111** for the default password and press **enter**.

** This password can be changed inside *general settings*.

** If you forget your password, please contact your dealership.



i. - General Settings Screen

From the general settings screen the end-user can customize how the screen and the content on the screen will be displayed. From this screen you can set; default language, units, home screen image, settings password, system time, and the display brightness.

Device Settings: 11:48:57am

Language: English Spanish

Units: Fahrenheit Celsius

Home Image: Holstein Jersey

Settings Password: 1111

System Time: 05/09/2014 11:48:57am **Set**

Brightness: [Slider bar]

Build Info:
 V2_0 5-6-14 SCU
 09/05/2014 11:32:12
 10.3.2.66

Back

Callouts:

- Select to change the operating language.
- Display temperature in either Fahrenheit or Celsius.
- Press here to change current set password.
- Press here to set the time in the PLC. *Note that the real time clock can drift up to 30 seconds each month.*
- You can adjust the brightness of the screen here. The screen will automatically dim after 30 seconds of inactivity on the home screen.
- The units build information will be displayed here. This can be used to determine the version that the PLC is currently running for troubleshoot & service calls.

Set Time: 11:56:54am

Current Date / Time:
 05/09/2014 11:56:54

New Date / Time:
 [5] / [9] / 2014 [11] : [56] : [51] **Set Time**

Back

Callouts:

- Will display the current time and date.
- Press "Set Time," once the current date and time have been entered onto the screen, to set the entered time.
- Press one of the input fields to set the corresponding internal, for either date or time.

ii. - Pasteurizer Settings Screen

The Pasteurizer Settings screen allows the user to set the time when each mode will activate during the day. Each mode must first be selected before the “Settings” button will appear. Once displayed on-screen press the “Settings” button to be taken to that modes device settings.

The unit can only operate in 1 mode at a time. Select the mode here by pressing the grey button. The grey button will turn green and a settings menu will appear on the right when the mode has been activated.

The unit can have multiple cycle types set to “On” at a time. You can toggle each cycle On or Off by pressing the green/red button.

To adjust the settings of a cycle type simply press the “Settings” button to the right to bring up that cycle types settings screen

Press to be taken to the Cycle Mode Settings screen.

Pasteurizer Settings: 1:49:21pm

Modes:

- Pre-cool Mode **Settings**
- Reheat Mode
- Manual Start Only

Cycle Types:

- On Calf Milk Pasteurize **Settings**
- Off Temperature Hold **Settings**

Back

Pre-Cool Mode Settings

Pre-cool mode sets when the pasteurizer will begin to cool the calf milk. This can be set to any time of the day and if desired multiple start times can be activated and set. The pre-cool temperature and cycle agitation time can also be set here for the Pre-Cool mode.

Temperature that the calf milk will maintain will waiting for pasteurization inside the tank.

The unit can have 3 different start times set. This allows the unit to pasteurize for feeding three times a day. For example, if you fill the unit at 10pm, it will pre-cool until 5 am at which point pasteurization will start. If you fill the unit at 7am, it will pre-cool until 6pm which at that point pasteurization will start. You can also turn off the second & third start time if you only feed once a day.

Cycle agitation will agitate the milk prior to pasteurization while waiting for the pasteurize start time.

Precool Settings: 1:50:38pm

Precool Temperature: 57.0 °F

Pasteurize Start Time 1: 5 : 00 AM

Enable Second Start Time

Pasteurize Start Time 2: 6 : 00 AM

Enable Third Start Time

Pasteurize Start Time 3: 7 : 00 AM

Cycle Agitation

On Time: 15 sec **Off Time:** 300 sec

Back

Reheat Mode Settings

Reheat mode sets when the pasteurizer will begin to reheat the calf milk inside the tank. This can be set to any time of the day and if desired multiple start times can be activated and set. The reheat temperature and cycle agitation time can also be set here for the Reheat mode.

Reheat Settings: 1:51:48pm

Reheat Temperature: 110.0 °F

Reheat Start Time 1: 5 : 00 AM

Enable Second Start Time

Reheat Start Time 2: 6 : 00 AM

Enable Third Start Time

Reheat Start Time 3: 7 : 00 AM

Cycle Agitation

On Time: 15 sec **Off Time:** 300 sec

Back

Set temperature that the calf milk will reach before feeding to the calves.

The unit can have 3 different start times set. This allows the unit to pasteurize for feeding three times a day. For example, if you fill the unit at 10pm, it will immediately pasteurize then cool down and maintain this cool temperature until 5 am at which point the unit will reheat to the set reheat temperature.

Cycle agitation will agitate the milk after pasteurization has occurred, waiting for the reheat start time.

Calf Milk Cycle Settings

Calf Milk settings will allow for the customization of the pasteurizer heating process and will allow the user to adjust the temperature, pasteurize time, cool temperature and cycle agitation. These settings can be changed, though it is not recommended due to the Pasteurized Milk Ordinance.

Calf Milk Settings: 1:54:34pm

Pasteurize Temperature: 145 °F

Pasteurize Time: 30 min

Cool Temperature: 110 °F

Cycle Agitation:

On Time: 15 sec **Off Time:** 300 sec

Back

Set to change how hot the pasteurizer will become.

Set to change the duration that the milk will be heated.

This must be set at least 4°F above supply water temperature.


Cycle agitation will agitate the milk during pasteurization to maintain a consistent heat throughout the calf milk.



Pasteurized Milk Ordinance states, milk must be heated to 145°F and held there for 30 minutes. Any changes from these settings may result in non-pasteurized milk.

Temperature Hold Settings

The temperature hold feature is a heat or cool override that will last until the temperature hold is disabled. On this settings screen you can set the desired temperature that the pasteurizer unit will maintain.

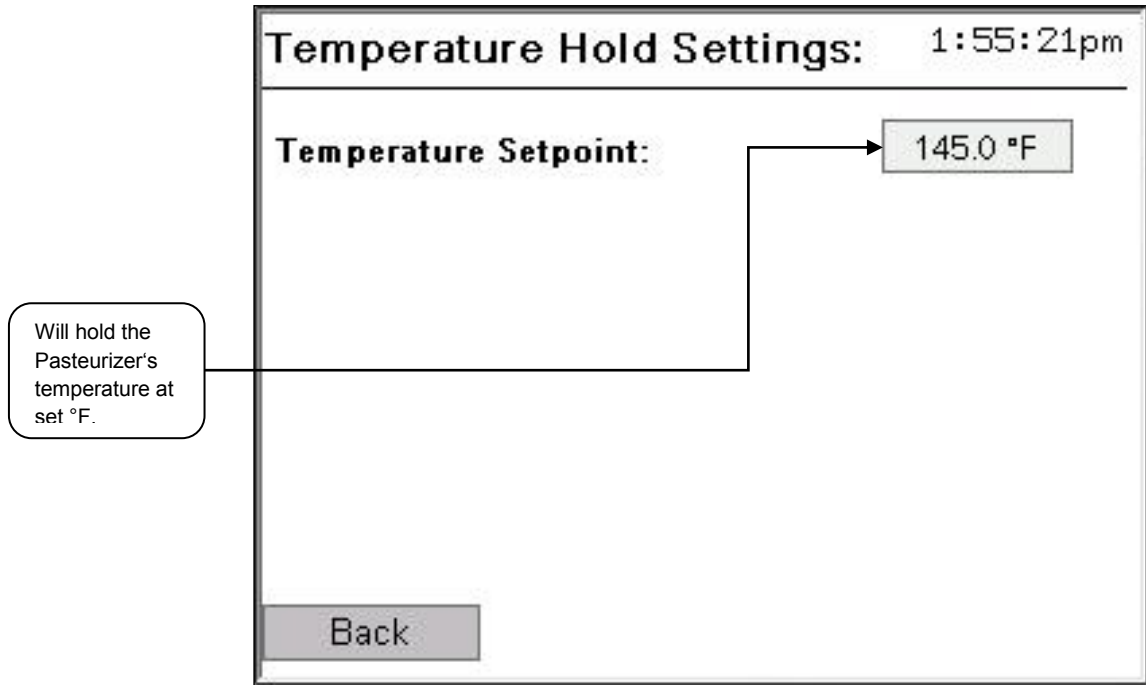

iii. - Wash Settings

These settings will allow for the set up of the wash cycle. Each cycle can be customized to perform a different task, whether from a rinse, detergent or acid cycle. Here you can also toggle a cycle to the Off position to disable it from activating during a wash phase.

Wash Settings: 1:59:14pm

Wash Cycles:

- On PRE-RINSE CYCLE
- On DETERGENT CYCLE
- On RINSE CYCLE
- On ACID CYCLE
- On FINAL RINSE CYCLE

Press button to toggle cycle on or off.

Press settings to bring up individual wash cycle settings.

Cycle Settings

Wash cycle settings allows for each one of the cycles to be custom set. This screen will allow the operator to set the name of the cycle, the water temperature, chemical pump operation and fill / circulation / drain time.

Wash Cycle 1 Settings: 1:57:32pm

Cycle Name:

Water Temperature: Cold Hot Warm

Chem Pump: Pump 1 Pump 2 Off

Chem Pump time:

Fill time:

Circulation time:

Drain Time:

Press to add or edit a name to the wash cycle.

Select either Cold Hot or warm by pressing the

Set duration time for Fill, Circulation and Drain

iv. – Aux Input / Output Settings

The Aux Input / Output or Aux IO settings allow the pasteurizer to add in automated or remote control inputs. These custom components allow the pasteurizer to be more flexibility to custom additional features making the unit more user friendly to a specific dairy. To apply additional features, wiring will need to be installed to the terminal blocks located inside the control panel. The input / output terminal blocks hook ups are displayed below after the Aux IO description.

Aux IO Settings: 1:59:12pm

Input:

- Trigger Dispense 0.000 sec
- Dispense on Input
- Pre-cool Pasteurize Start Disabled

Output:

- Divert: 0.0 °F 0 sec
- Wash Drain Valve Disabled


Callouts:

- An active switch that once pressed will activate the pasteurizer pump to dispense liquid from the vat for a set amount of time before shutting off.
- An active switch that once toggled will activate the pasteurizer pump to continually dispense liquid from the vat until the switch is turned off.
- Enabled if using a remote start button or switch, that is not in reach of the pasteurizer control box touch screen.
- Divert will activate the pasteurizer pump when a set temperature is reached. The pump will run for a set amount of time before shutting off.
- Enable if using an electric drain valve.

Back


Aux Wire Connections

Each control box comes with two auxiliary terminal blocks, one for input and one for output. The auxiliary terminal blocks are located inside the control box in the top right corner on a terminal distribution block. The input and output terminal blocks are the last two on the right in the distribution block. The two auxiliary terminal blocks can be seen in the red circle in the image below and on the following page.

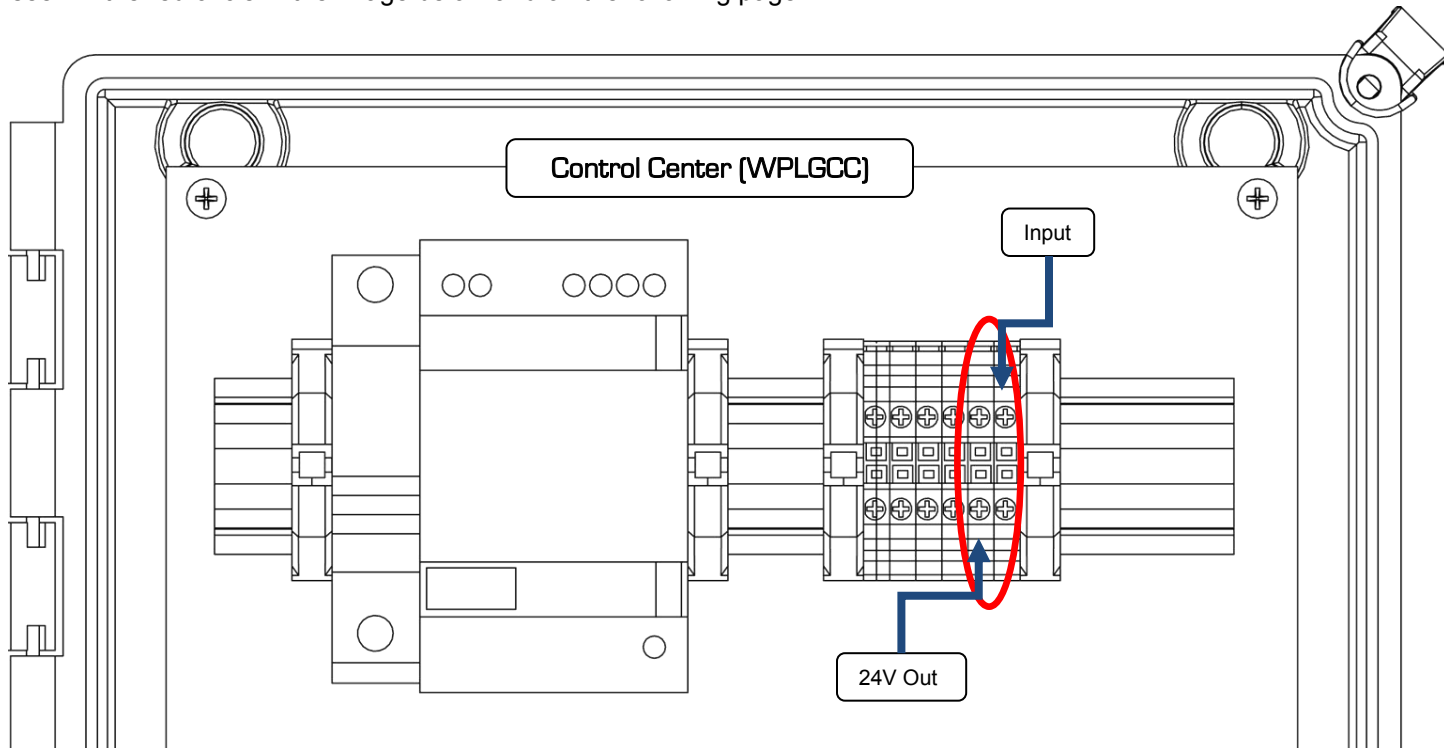

Aux Wire Connections

Control Center High Capacity (WPLGCCHC)

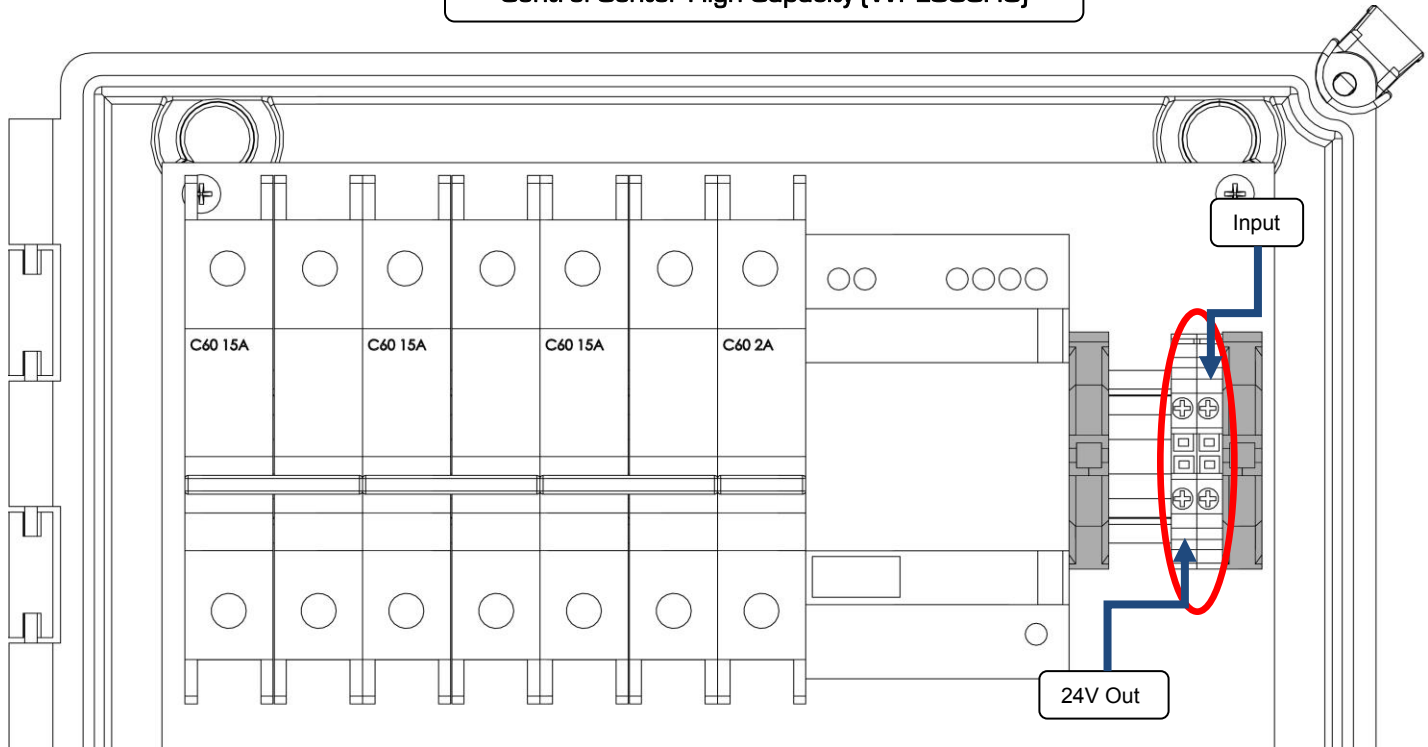

v. - Service Menu Screen

The service menu will allow for the manual operation of each device on the pasteurizer unit. This manual can be used to troubleshoot each device if a problem is detected.

Service Menu: 2:00:08pm

- Off Pump Motor
- Off Heating Element / Hot Water Solenoid
- Off Cold Water Solenoid
- Off Cold Water Wash Solenoid
- Off Hot Water Wash Solenoid
- Off Aux Output

Back Sensor Settings

Press a button to toggle output On or Off.

Pressing the back button will shut off all outputs.

Press to bring up Vat Sensor Settings



Running pumps with no liquid can burn out pump seals.

Vat Sensor Settings

The Vat sensor settings control the range of the pasteurizer unit for temperature consistency. This allows the product inside the vat to heat or cool with less variance in temperature drop. The Vat sensor settings can be found in the Service Menu from the Operation Settings screen.

Vat Sensor Settings: 2:00:45pm

Units: Fahrenheit Celsius

Vat Temperature Offset: 0.0 °F

Vat Sample Interval: 0.000 Sec

Vat Samples for Average: 0

Vat Temperature Raw Value: 0.0 °F

Vat Temperature For Logic: 0.0 °F

Vat Temperature Display Rounded: 0 °F

Vat Temperature Converted: 0.0 °F

Back

Although easily accessible, the vat sensor settings should only be changed with the explicit instructions of an authorized dealer or technician.

3.7 Temperature recordings

Temperature Recordings can be found on the Settings Menu screen (see section 3.2). Here all the data is recorded from the pasteurizer cycles. Pasteurization and Wash cycle data can be viewed in a graph format from time of day to temperature reached.

Temperature Recordings: 2:01:39pm

Pasteurization Cycle Recordings

Wash Cycle Recordings

Back

Graph Time Scale: 8 hours


Press here to view the Pasteurize Cycle recordings

Press here to view the Wash Cycle recordings chart.

Press to set the length scale for the graph chart


i. – Pasteurize & Wash Cycle Graph

This graph will illustrate the hour and recorded temperature on any given day. Temperatures are logged throughout each wash and pasteurization cycle and all information is stored here for viewing and data logging. To view past dates click on the calendar in the top left corner to enlarged the calendar size.

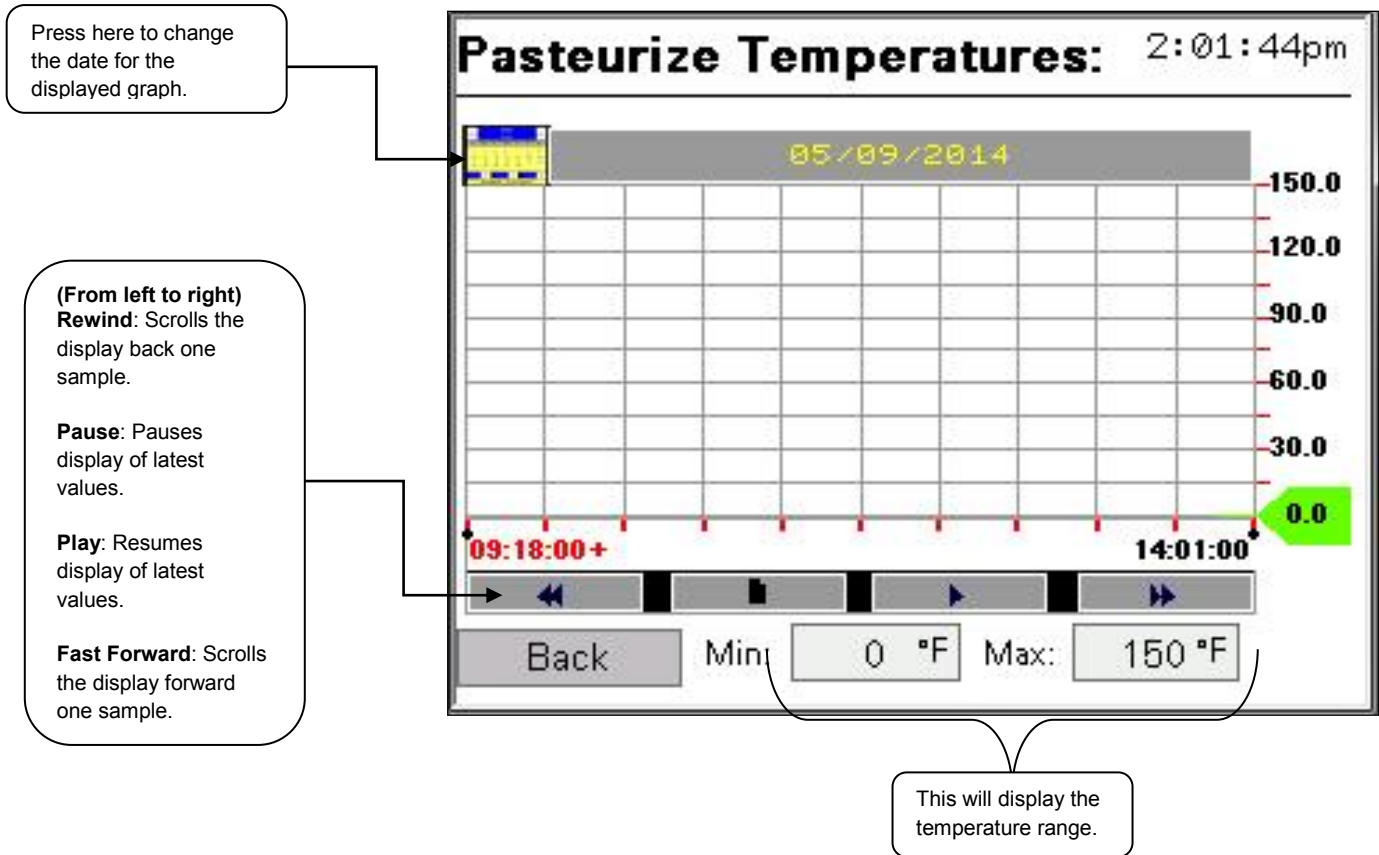

3.8 Completed Cycles

Completed Cycles Screen can be found on the Settings Menu screen (see section 3.2). This screen will record the last 8 completed cycles and the cycle duration.

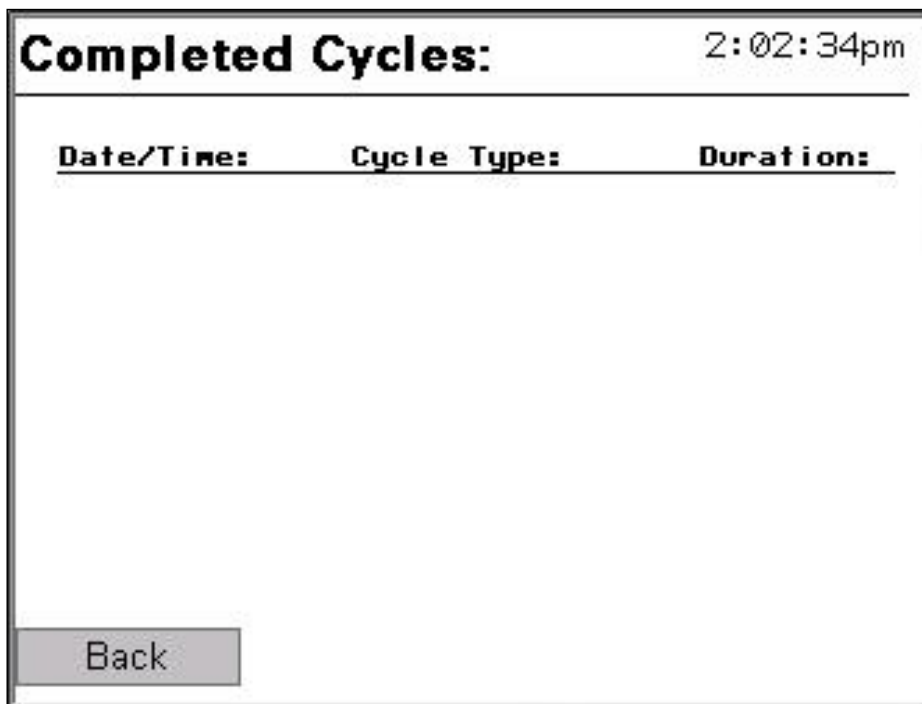

3.9 Menu Diagram

- Home Screen
 - Settings
 - Operation Settings
 - General Settings
 - Language
 - Unit Display (Fahrenheit, Celsius)
 - Home Image
 - Settings Password
 - System Time
 - Brightness
 - Pasteurizer Settings
 - Operating Mode **** only 1 mode can be selected**
 - Pre-cool
 - Start times
 - Pre-cool temperature
 - Cycle agitation
 - Reheat
 - Start times
 - Reheat temperature
 - Cycle agitation
 - Manual
 - Cycle Types **** multiple different cycle types can be enabled**
 - Calf Milk Pasteurize
 - Pasteurize hold time
 - Pasteurize temperature
 - Cool temperature
 - Temperature Hold
 - Hold Temperature
 - Wash Settings
 - Cycle 1-5 Settings
 - Cycle name
 - Water temperature
 - Fill time
 - Circulation time
 - Drain time
 - AUX Input / Output Settings
 - Trigger Dispense
 - Dispense on Input
 - Pre-cool Pasteurize Start – Enable/Disable
 - Divert
 - Hot Water Assist
 - Wash Drain Valve – Enable/Disable
 - Service Menu
 - Pump Motor - On/Off
 - Burner – On/Off
 - Cold Water Solenoid – On/Off
 - Cold Water Wash Solenoid – On/Off
 - Hot Water Wash Solenoid – On/Off
 - Temperature Recordings
 - Pasteurization Cycle Recordings
 - Chart of recordings
 - Wash Cycle Recordings
 - Chart of recordings
 - Completed Cycles
 - Lists all completed Pasteurize and Wash cycles

Section 4 – Operation

The Westwaard Pasteurizer is an agitated batch pasteurizer. A PLC controls all functions of the unit. The WP uses an external heat source, which transfers the heat through to the milk in the unit to set a temperature and keeps it there for a set holding duration. It then cools the milk by passing cold water through a heat exchanger until the milk reaches the set temperature. Please be aware the PMO for a batch pasteurizer calls for heating to 145 degrees and holding it at that temperature for 30 minutes. Any adjustment made to the heat temperature can take the unit out of what the call out is for proper pasteurization.



Vat reaches temperatures of approximately 150° F during heating cycle. Contact with vat will create burn risks. Caution must be taken with young children around equipment.



Guards and covers which prevent contact with electrically energized or moving parts or are required to direct the flow of air for effective cooling, must not be removed or left open during operation.

4.1 Pasteurization

Pasteurizer Operation Modes

-The Westwaard Pasteurizer can operate in only **one** of the following modes:

- **Pre-cool Pasteurization**
- **Reheat Pasteurization**
- **Manual Pasteurization**

-Refer to section 3.4 to change mode of operation.

i. Pre-cool Pasteurization

In Pre-cool mode, the product will maintain a set pre-cool until the set pasteurize start time. At that point, the product will run through the selected Pasteurization Cycle, then cool back down to the set temperature. The cycle is now complete.

***There can be 2 set start times for this cycle.*


1.	Close manual drain valve.
2.	Install agitation tube in vat.
3.	Load milk into unit.
4.	Move selector switch to pasteurize position.
5.	Set Pasteurize start times by pressing the hour and minute blocks. Press AM/PM to toggle. Then press <i>Pre-cool Cycle Start</i> to begin cycle.

Calf Milk Cycle: 12:00:00 am

Pasteurize start time 1: :

Pasteurize start time 2: :

i. Pre-cool Pasteurization (continued)

<p>6.</p>	<p>Screen will display the status of the pre-cool cycle.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Pre-cool cycle ON Target Temperature: 57 °F Pasteurize Start Time: 6:00 AM Cycle Agitation: Enabled 10.0 sec on, 45.0 sec off</p> <p style="text-align: right;">65 ° F</p>
<p>7.</p>	<p>Screen will display progress on heating once the clock reaches pre-cool start time.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Heating ON Target Temperature: 145 °F</p> <p style="text-align: center;"></p> <p style="text-align: right;">65 ° F</p>
<p>8.</p>	<p>Once milk reaches the set temperature, the unit will maintain this temperature for 30 minutes providing a countdown of time remaining for the hold duration.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>30 min Temperature Hold Hold time remaining: 00:29:59 Hold Temperature: 145 °F</p> <p style="text-align: right;">145 ° F</p>
<p>9.</p>	<p>After the hold duration is complete, the unit will start to cool the milk to the set temperature.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Pasteurization Complete Cooling ON Target Temperature: 55 °F</p> <p style="text-align: right;">145 ° F</p>

i. Pre-cool Pasteurization (continued)

10.	Pasteurization cycle is now complete. Move selector switch to off position to use pump switch to dispense.
------------	--

Calf Milk Cycle: 12:00:00 am

**Pasteurization Cycle
Complete**

Maintaining Temperature

Turn switch to off/pasteurize to dispense

Cycle Agitation: **Enabled**
15.0 sec on, 300.0 sec off

105 °F

ii. Reheat Pasteurization

In Reheat mode, the product will immediately start the Pasteurization Cycle, cool back down to the set temperature and maintain this temperature until the set reheat start time. At that point the product will be reheated to set temperature ready to dispense. The cycle is now complete.

***There can be 2 set start times for this cycle.*

1.	Close manual drain valve.
2.	Install agitation tube in vat.
3.	Load milk into unit.
4.	Move selector switch to pasteurize position.

5.	Set Reheat start times by pressing the hour and minute blocks. Press AM/PM to toggle. Then press <i>Reheat Cycle Auto Start</i> to begin cycle.
-----------	---

Calf Milk Cycle: 12:00:00 am

Reheat start time 1: :


Reheat start time 2: :

6.	Screen will display progress on heating.
-----------	--

Calf Milk Cycle: 12:00:00 am


Heating ON

Target Temperature: 145 °F



65 °F


ii. Reheat Pasteurization (continued)

<p>7.</p>	<p>Once milk reaches the set temperature, the unit will maintain this temperature for 30 minutes providing a countdown of time remaining for the hold duration.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>30 min Temperature Hold Hold time remaining: 00:29:59 Hold Temperature: 145 °F</p> <p style="text-align: right; font-size: 2em;">145 °F</p>
<p>8.</p>	<p>After the hold duration is complete, the unit will start to cool the milk to the set temperature and maintain this temperature until the set re-heat start time.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Pasteurization Complete Cooling ON Target Temperature: 57 °F Re-Heat Start Time: 6:00 PM Cycle Agitation: Enabled 10.0 sec on, 45.0 sec off</p> <p style="text-align: right; font-size: 2em;">145 °F</p>
<p>9.</p>	<p>Reheat cycle will heat up the milk to the set temperature.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Re-heat cycle ON Target Temperature: 110 °F</p> <p style="text-align: right; font-size: 2em;"> 108 °F</p>
<p>10.</p>	<p>Once the milk has reached the set temperature, the cycle is complete, and the milk can be dispensed.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <hr/> <p>Pasteurization Cycle Complete Maintaining Temperature Turn switch to off/pasteurize to dispense Cycle Agitation: Enabled 15.0 sec on, 300.0 sec off</p> <p style="text-align: right; font-size: 2em;">105 °F</p>

iii. Manual Pasteurization

In Manual mode, the product will immediately start the Pasteurization Cycle, cool back down to the set temperature. The cycle is now complete.

1.	Close manual drain valve
2.	Install agitation tube in vat
3.	Load milk into unit
4.	Move selector switch to pasteurize position
5.	Press <i>Manual Start</i> to begin cycle.
6.	Screen will display progress on heating.
7.	Once milk reaches the set temperature, the unit will maintain this temperature for 30 minutes providing a countdown of time remaining for the hold duration.

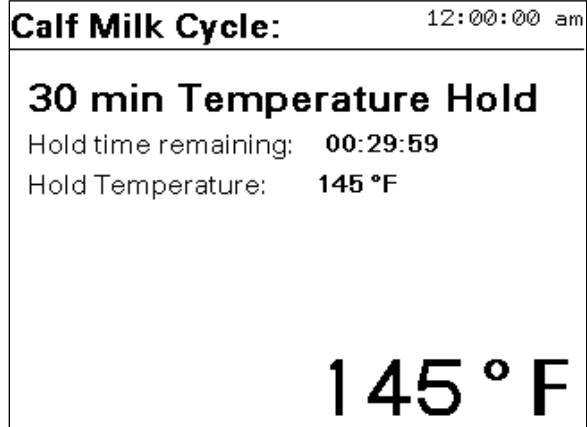

iii. Manual Pasteurization (continued)

<p>8.</p>	<p>After the hold duration is complete, the unit will start to cool the milk to the set temperature.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <p>Pasteurization Complete Cooling ON Target Temperature: 55 °F</p> <p style="text-align: right;">145 °F</p>
<p>9.</p>	<p>Pasteurization cycle is now complete. The milk can now be dispensed.</p>	<p>Calf Milk Cycle: 12:00:00 am</p> <p>Pasteurization Cycle Complete Maintaining Temperature Turn switch to off/pasteurize to dispense Cycle Agitation: Enabled 15.0 sec on, 300.0 sec off</p> <p style="text-align: right;">105 °F</p>

4.2 Temperature Hold

Must be enabled to activate on screen, refer to section 3.4 to enable.

<p>1.</p>	<p>Move selector switch to pasteurize position.</p>	<p>Pasteurization Cycle: 12:00:00am</p> <p>Select cycle:</p> <p style="text-align: center;"> <input type="button" value="Calf Milk Pasteurization"/> <input type="button" value="Temperature Hold"/> </p>
<p>2.</p>	<p>Press <i>Temperature Hold</i>.</p>	

4.2 Temperature Hold

3.	The unit will bring the substance in the vat up to the set temperature.
----	---

Temperature Hold: 12:00:00am

110 ° F

▲

▼

Temperature Hold Start

Back to Select Cycle Type

4.	Once the water reaches the set temperature, the unit will hold this temperature. Move selector switch to off position to stop the Temperature Hold and be brought back to the home screen.
----	--

Temperature Hold: 12:00:00am

Target Temperature:

110 ° F

▲

▼

Turn switch to off position to stop

80.0 ° F

4.3 Wash Mode

The Westwaard Pasteurizer has an onboard CIP system. It washes in a similar method to a typical dairy bulk tank. A PLC runs a 5 cycle wash by dispensing chemicals through Peristaltic Pumps. The 5 cycles are Pre-Rinse, Detergent, Rinse, Acid, and a final rinse to make sure all chemicals have been rinsed out from the unit.



Mixing of wash chemicals can cause potential dangerous fumes. Extreme caution must be taken when testing and setting of wash cycle to make sure chemicals are not allowed to mix.

1.	Open manual drain valve.
2.	Attach spray ball attachment.
3.	Move selector switch to wash position.
4.	Make sure Hose is connected to vat


5.	Press <i>Cycle Start</i> .
----	----------------------------

Wash Cycle: 12:00:00 am

- Wash valve open
- Spray ball installed
- Hose connected to vat
- Vat rinsed

Cycle Start

4.3 Wash Mode (continued)


6.	Unit will cycle through each cycle giving you a visual display of the progress of each step.	<p>Wash Cycle: 12:00:00am</p> <p>PRE-RINSE CYCLE Warm Filling DETERGENT CYCLE Hot Pending RINSE CYCLE Warm Pending ACID CYCLE Warm Pending FINAL RINSE CYCL Cold Pending</p> <p>Wash time remaining: 00:34:04</p>  <p>80.0 °F</p>
8.		<p>Wash Cycle: 12:00:00 am</p> <p>Wash Cycle Complete Turn switch to off/pasteurize</p>


4.4 Dispense Mode

With selector switch in OFF position, the dispense pump can be run using the switch on front of control panel. For unloading unit into calf buckets or bottles, install fork dispense nozzle, and use ball valve on end of hose to control milk flow.

1.	Move selector switch to the off position.
2.	Remove hose from vat.
3.	Attach dispensing nozzle onto hose.
4.	Turn pump on/off using the pump switch on the front of the panel.
5.	Use ball valve to regulate flow.

Section 5 – Wiring Diagram / Control Cabinet List

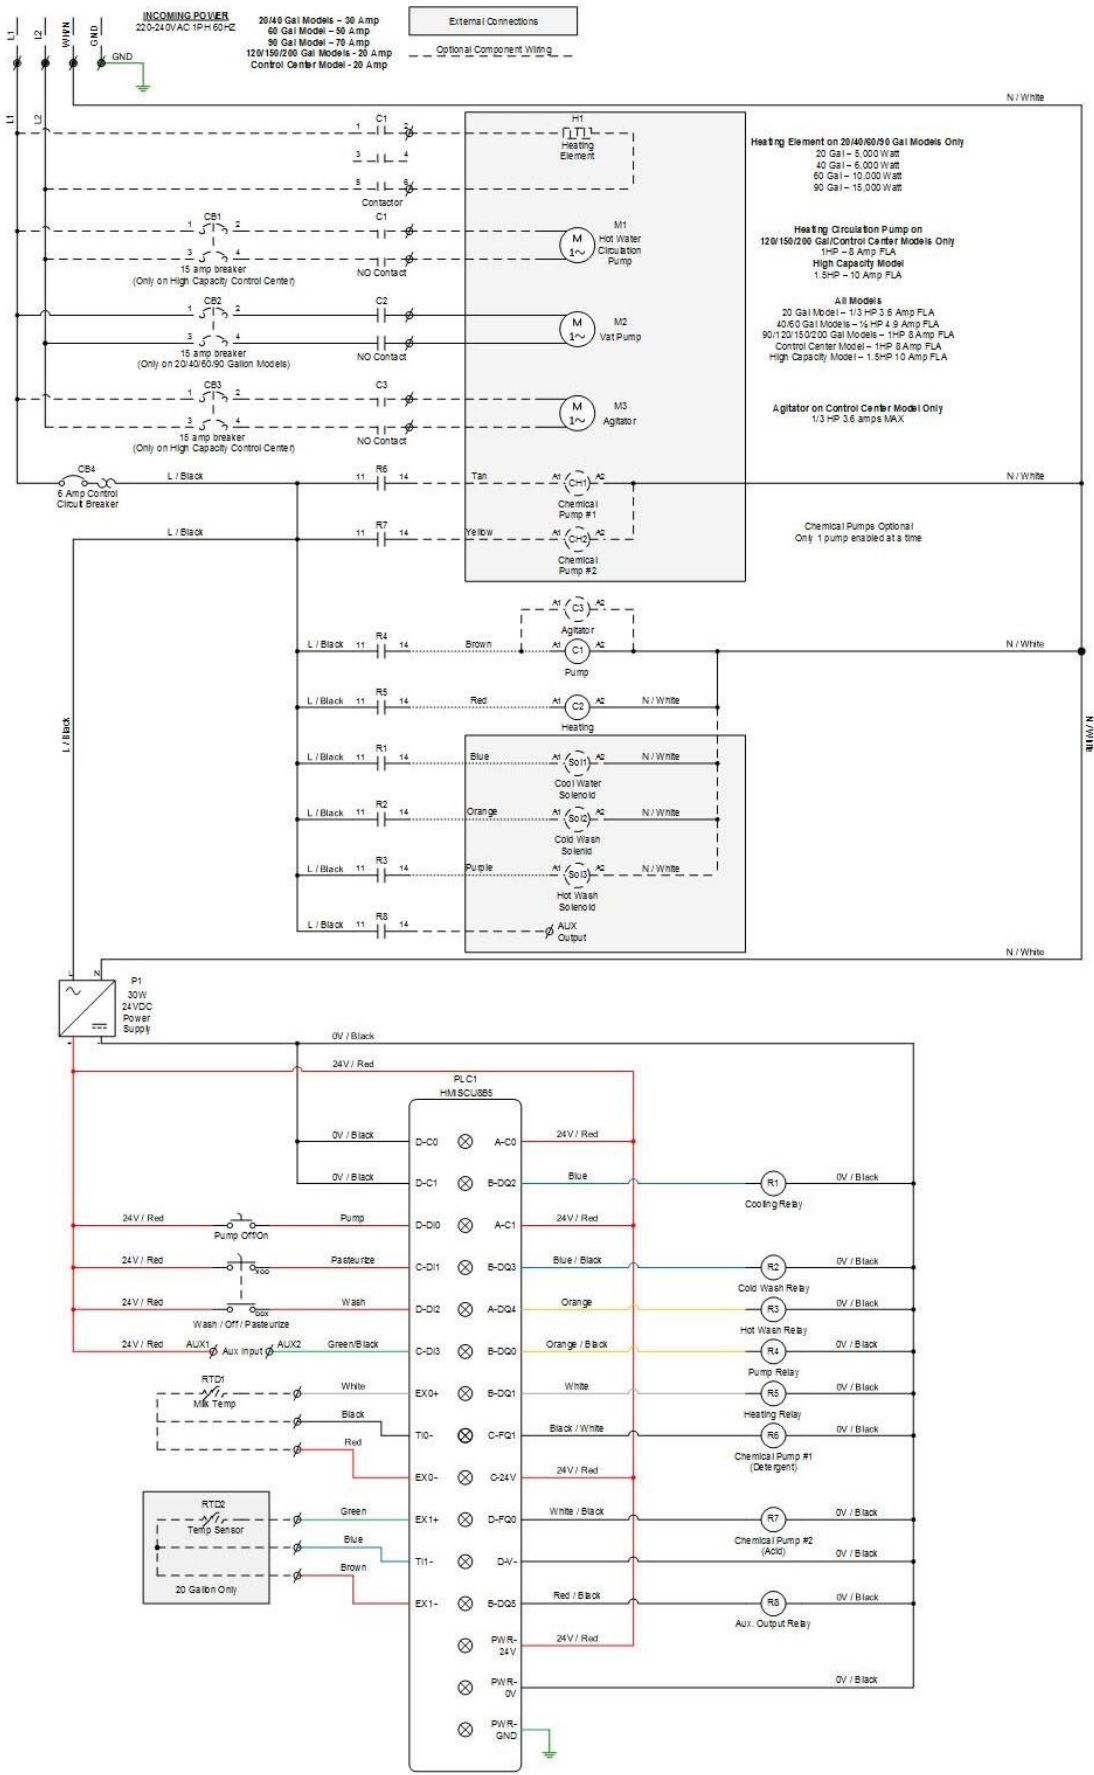


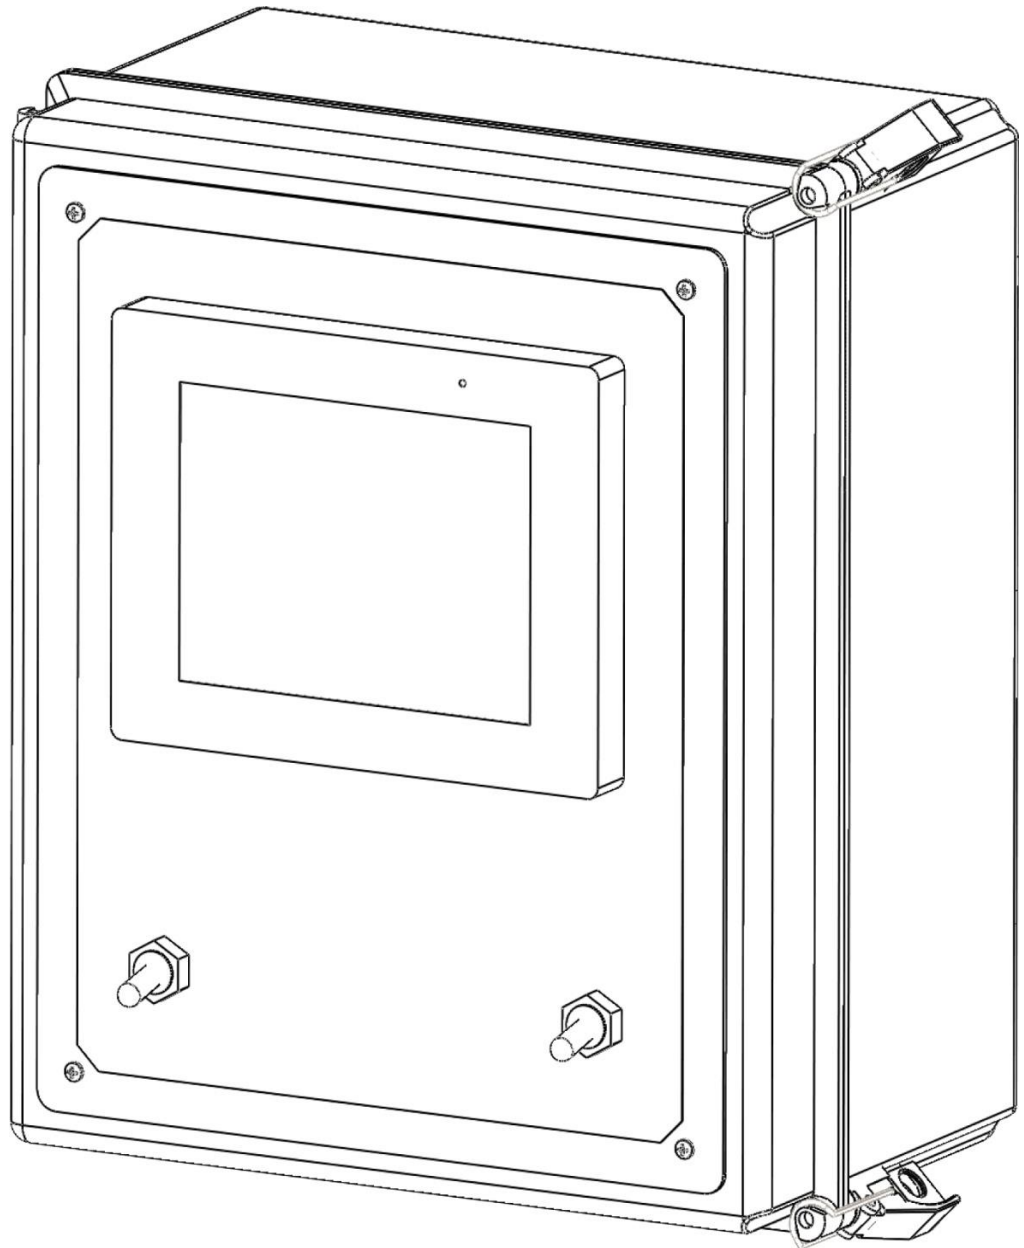

**Pasteurizer Control Cabinet
Model: WPLGCC & WPLGCCHC**


Component List

Front Panel

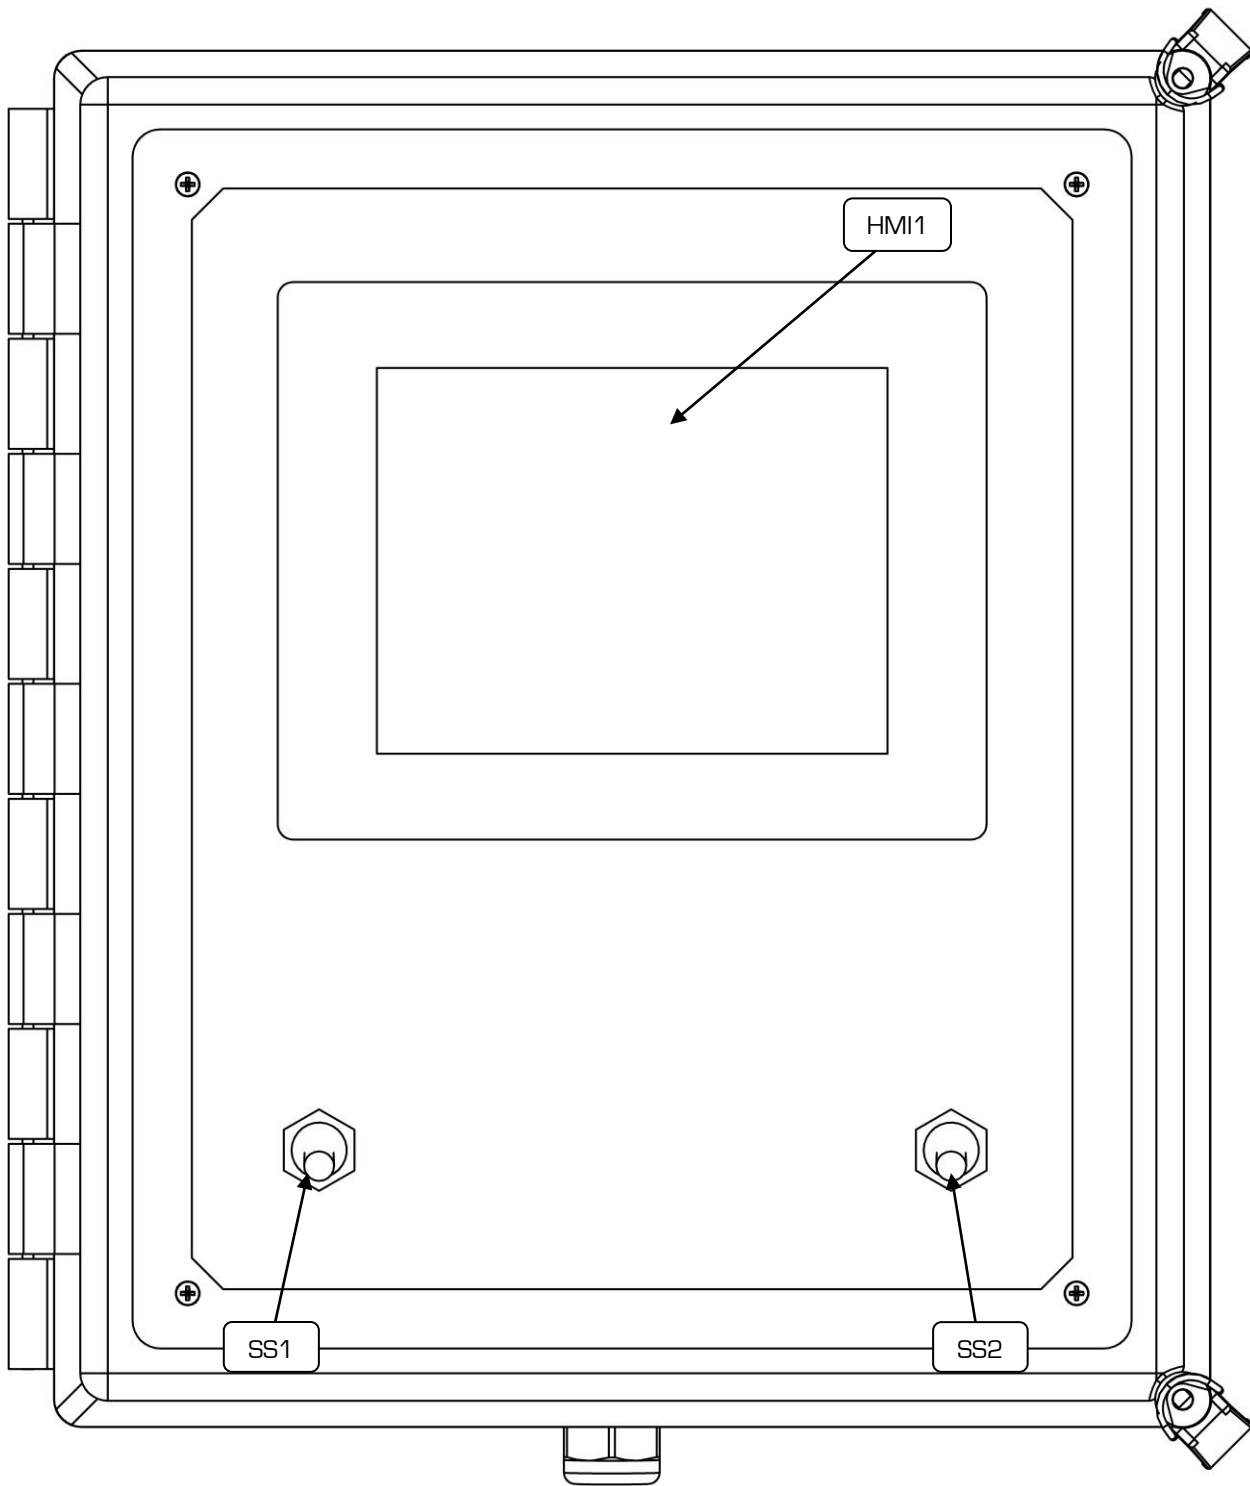


Label	Part #	Description
HMI1	O413	5.7" TFT HMISCU
SS1	G605	ON-OFF-ON 1P Toggle Switch W/Tab
SS2	A608	ON-OFF 1P Toggle Switch W/Tab

Control Center (WPLGCC) Internal Components

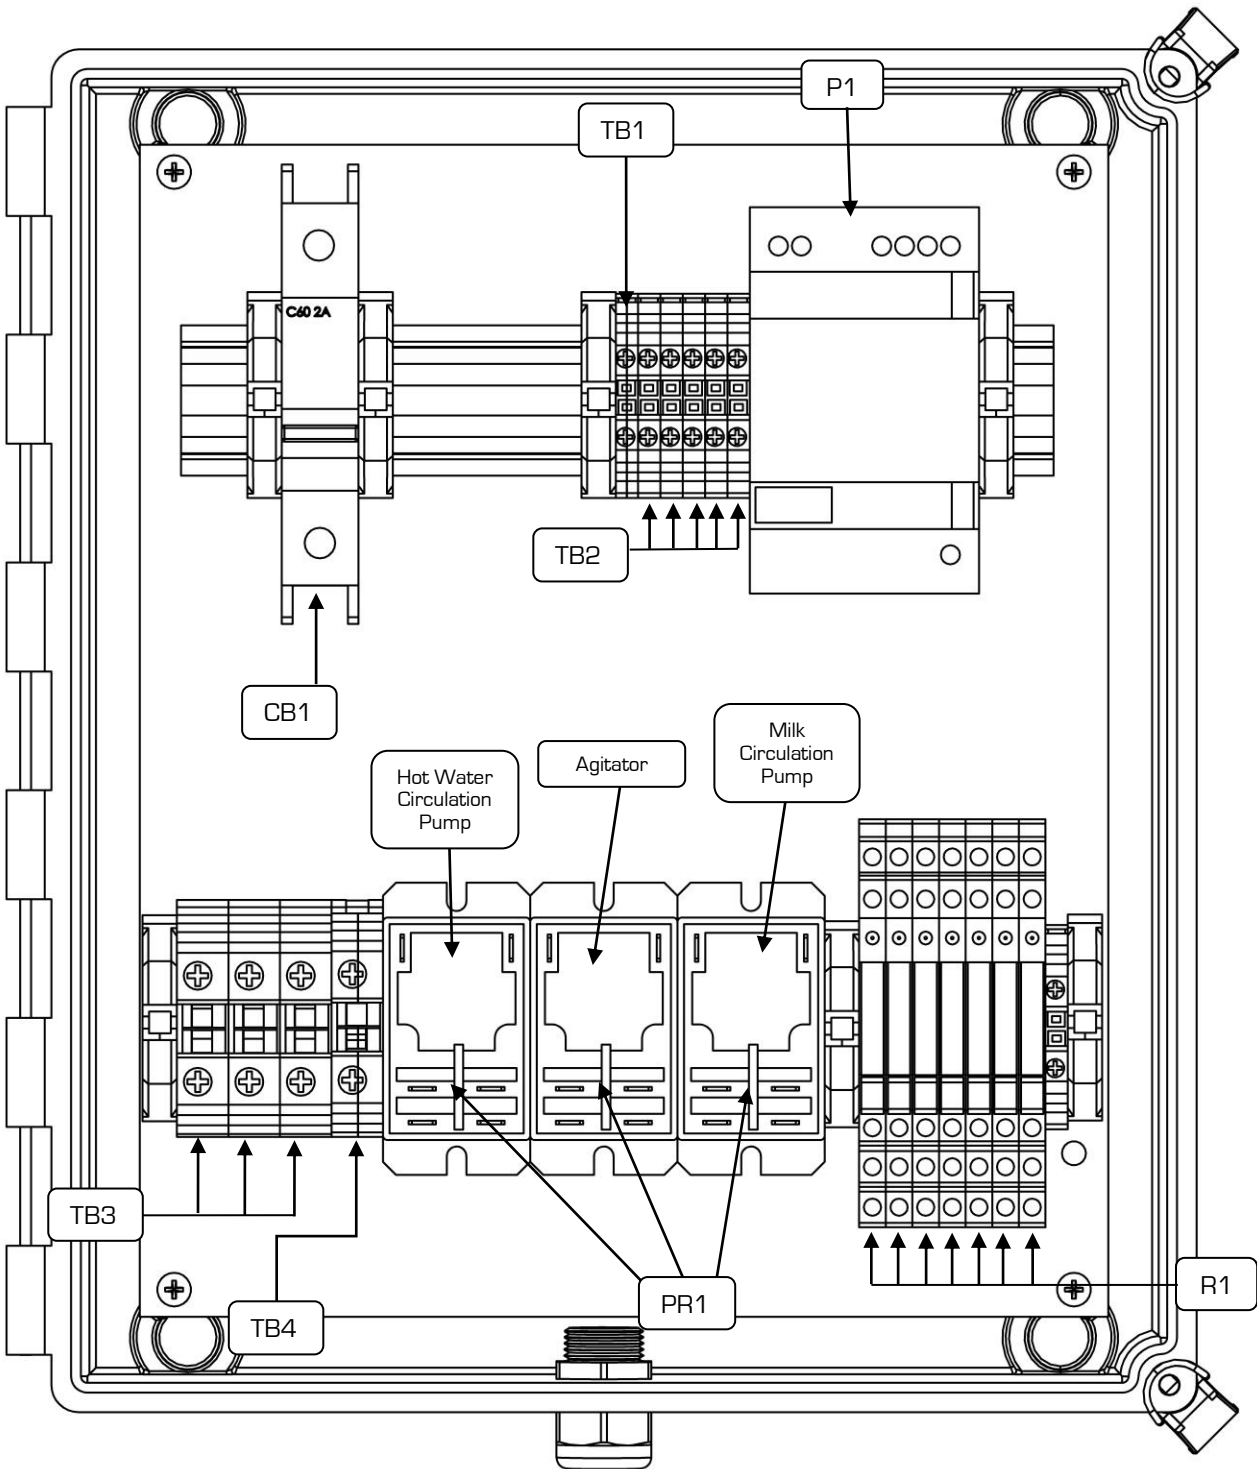

Label	Part #	Description
P1	J849	30W Power Supply
CB1	P465	6A Circuit Breaker
TB1	V791	2.5mm Terminal Grounding Block
TB2	J749	2.5mm Terminal Block
TB3	X737	16mm Terminal Block
TB4	Z414	16mm Terminal Grounding Block
PR1	U867	30A Power Relay
R1	Y606	Slice Relay
	N458	Terminal End Block

Control Center High Capacity (WPLGCCHC) Internal Components

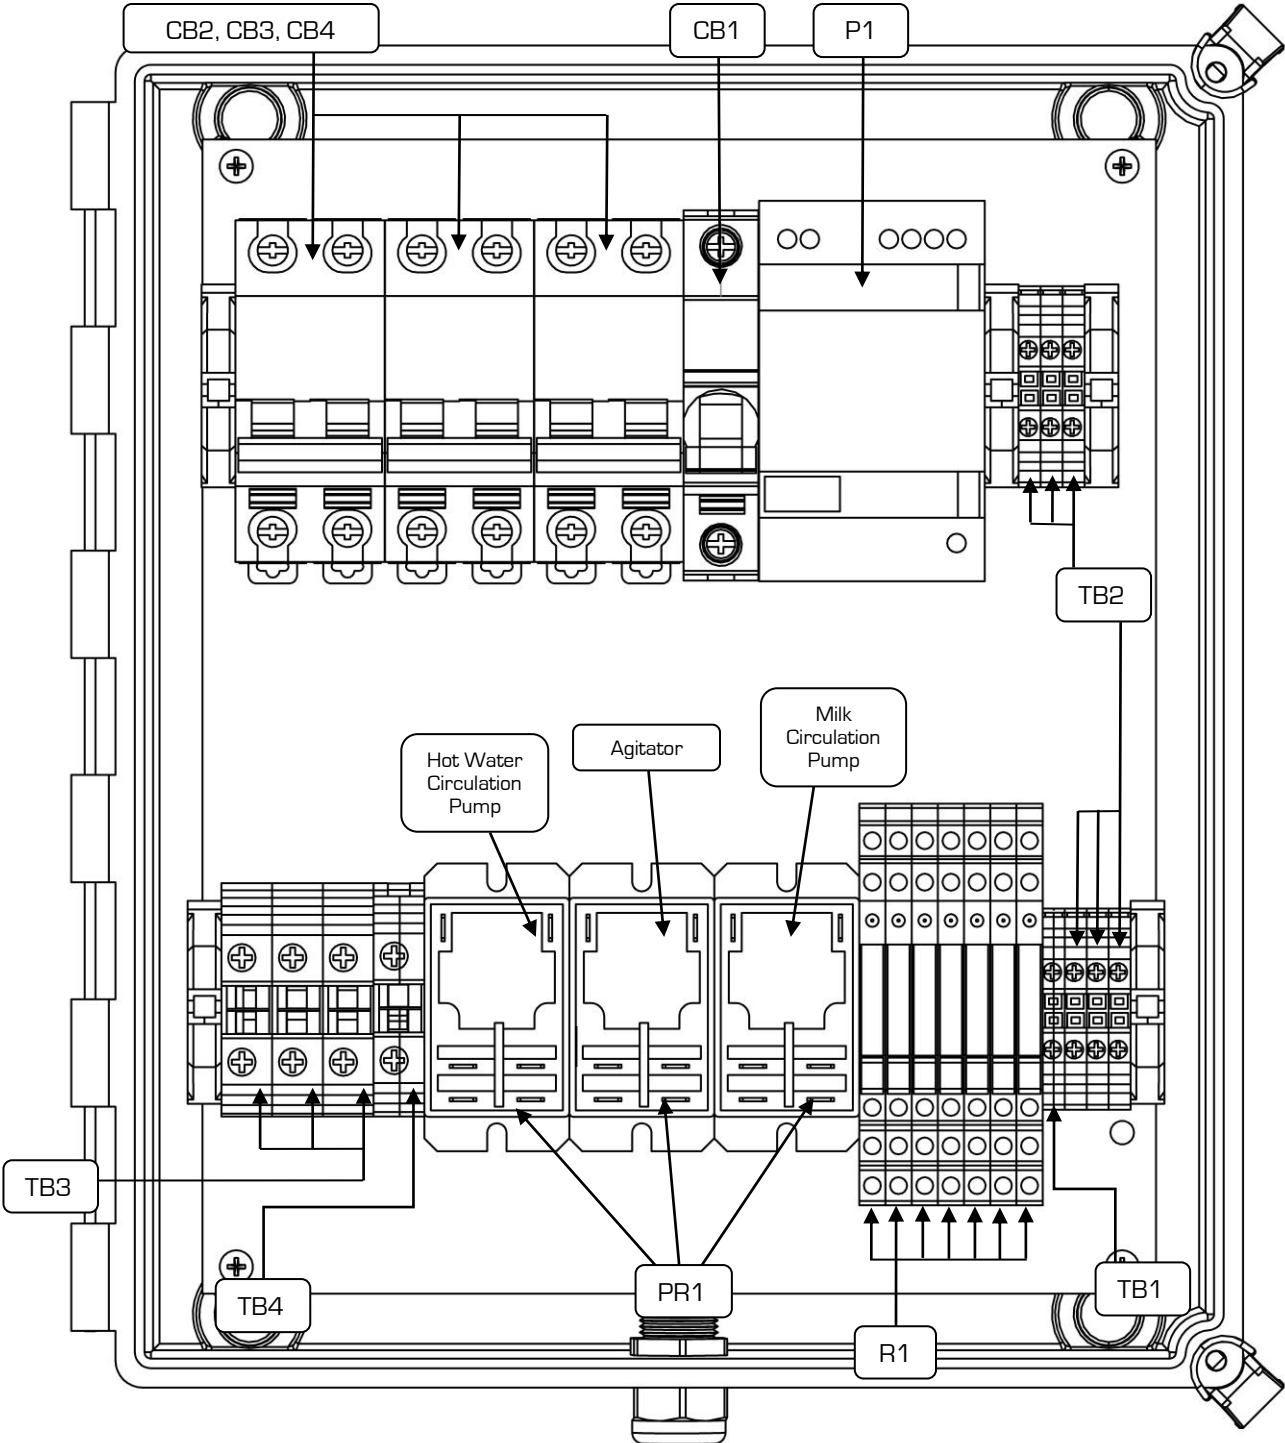

Label	Part #	Description
P1	J849	30W Power Supply
CB1	J864	2A Circuit Breaker
CB2, CB3, CB4	S791	15A Circuit Breaker
TB1	V791	2.5mm Terminal Grounding Block
TB2	J749	2.5mm Terminal Block
TB3	X737	16mm Terminal Block
TB4	Z414	16mm Terminal Grounding Block
PR1	U867	30A Power Relay
R1	Y606	Slice Relay
	N458	Terminal End Block




Contact

For Technical Support, to order Replacement Parts, or for questions about other products,
please contact your local dealer.



Calf Milk **Pasteurizer**


by Westwaard

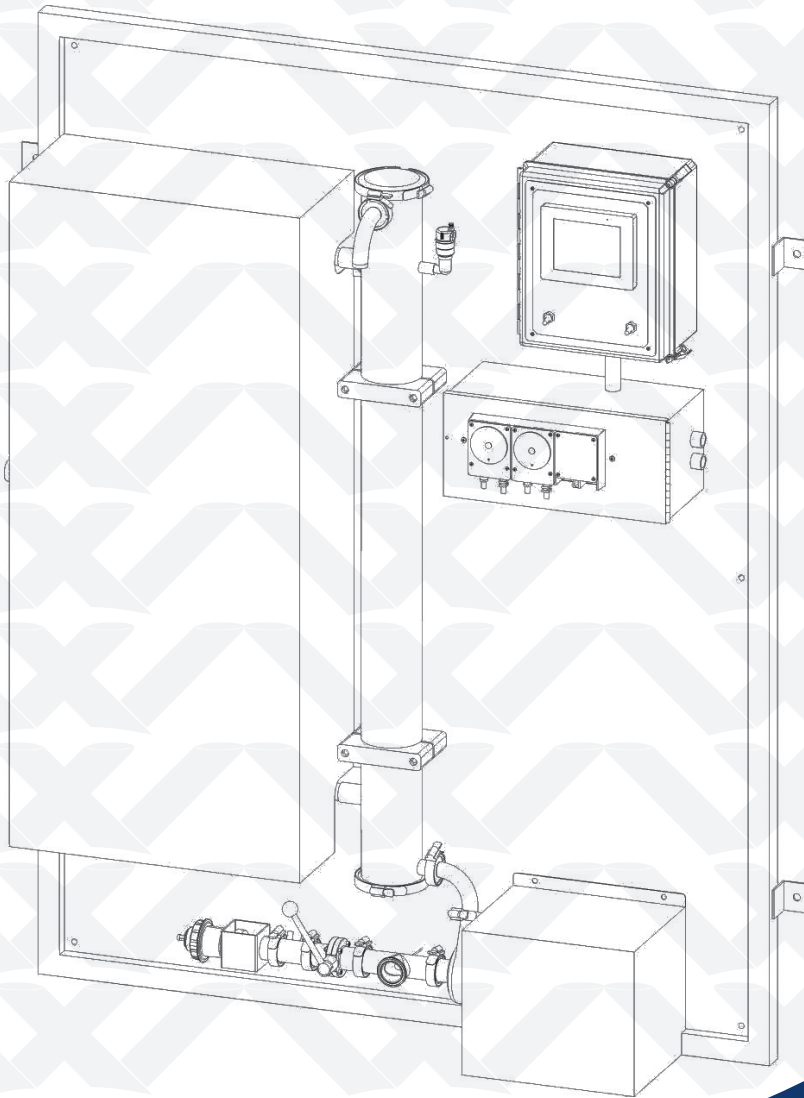

**Parts Manual
Control Center
(WPLGCC)**

WESTWAARD
FABRICATORS for DARITECH

Control Center - Heat Exchanger

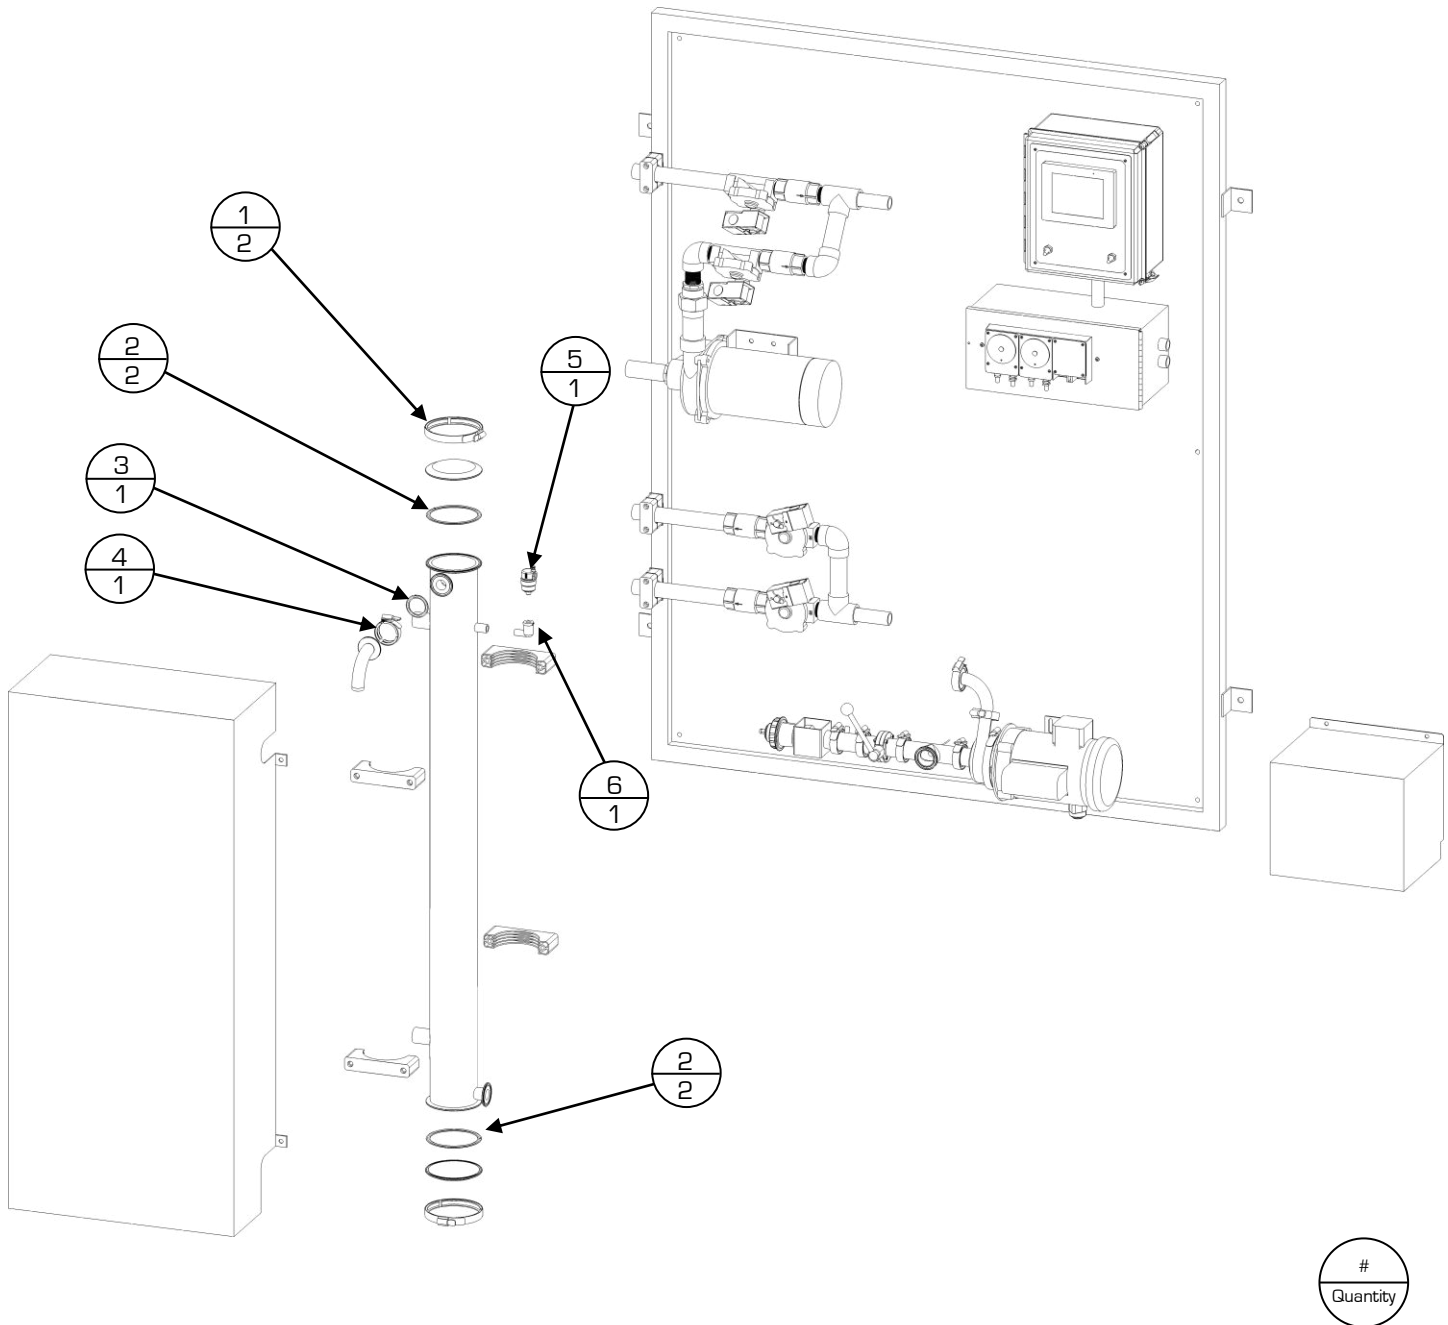


Quantity

Item #	Part #	Description
1	G844	4" SS V Insert Clamp
2	X459	4" Triclover Gasket
3	D294	1 1/2" Tri-clamp Rubber Gasket
4	A802	1 1/2" SS V Insert Clamp
5	K212	90° Galv ST
6	N422	1/4" Automatic Float Vent

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

Control Center – Motor Parts

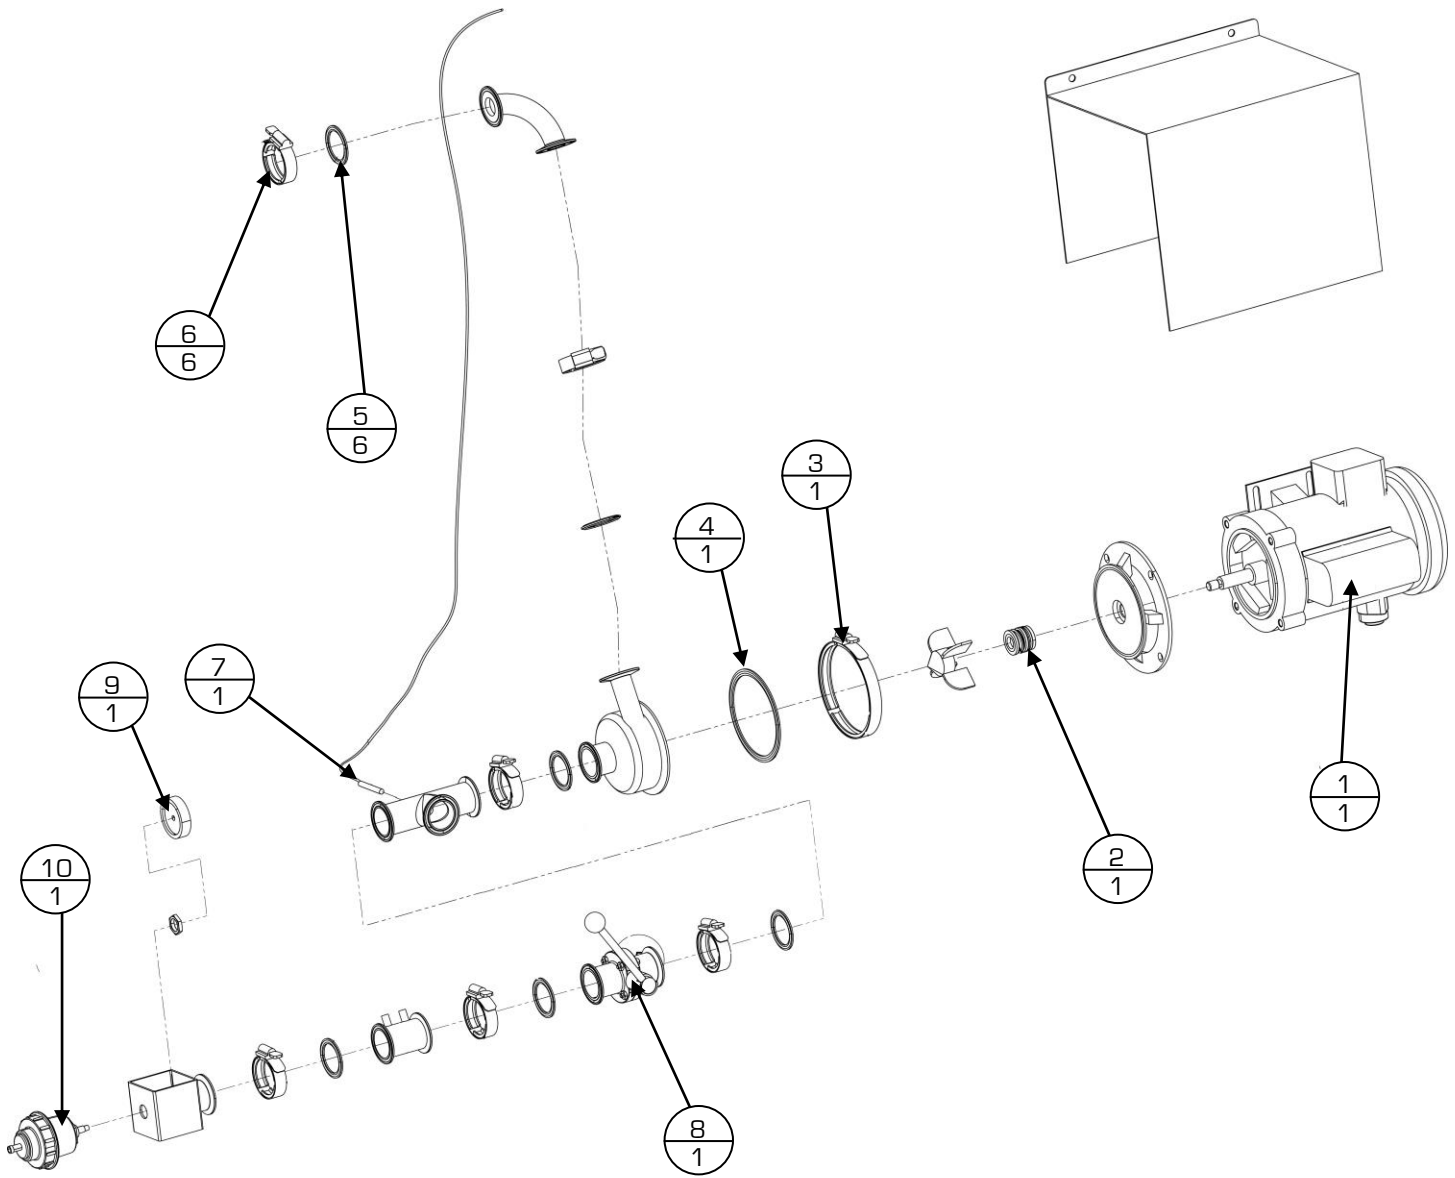


Quantity

Item #	Part #	Description
1	C748	1 HP, 3450 RPM, 1 PH, 56J, 3524I, TEFC, M13A MOD
2	U600	STA-Rite Seal PKG.
3	G844	4" SS V Insert Clamp
4	X459	4" Triclover Gasket
5	D294	1 1/2" Tri-clamp Rubber Gasket
6	A802	1 1/2" SS V Insert Clamp
7	B399	RTD Sensor
8	X879	1 1/2" Clamp SS Butterfly Valve
9	B757	Measure / Drain Valve Cap
10	U859	Auto Drain Valve Assy

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

Control Center – Pump Parts with Berkeley Pump

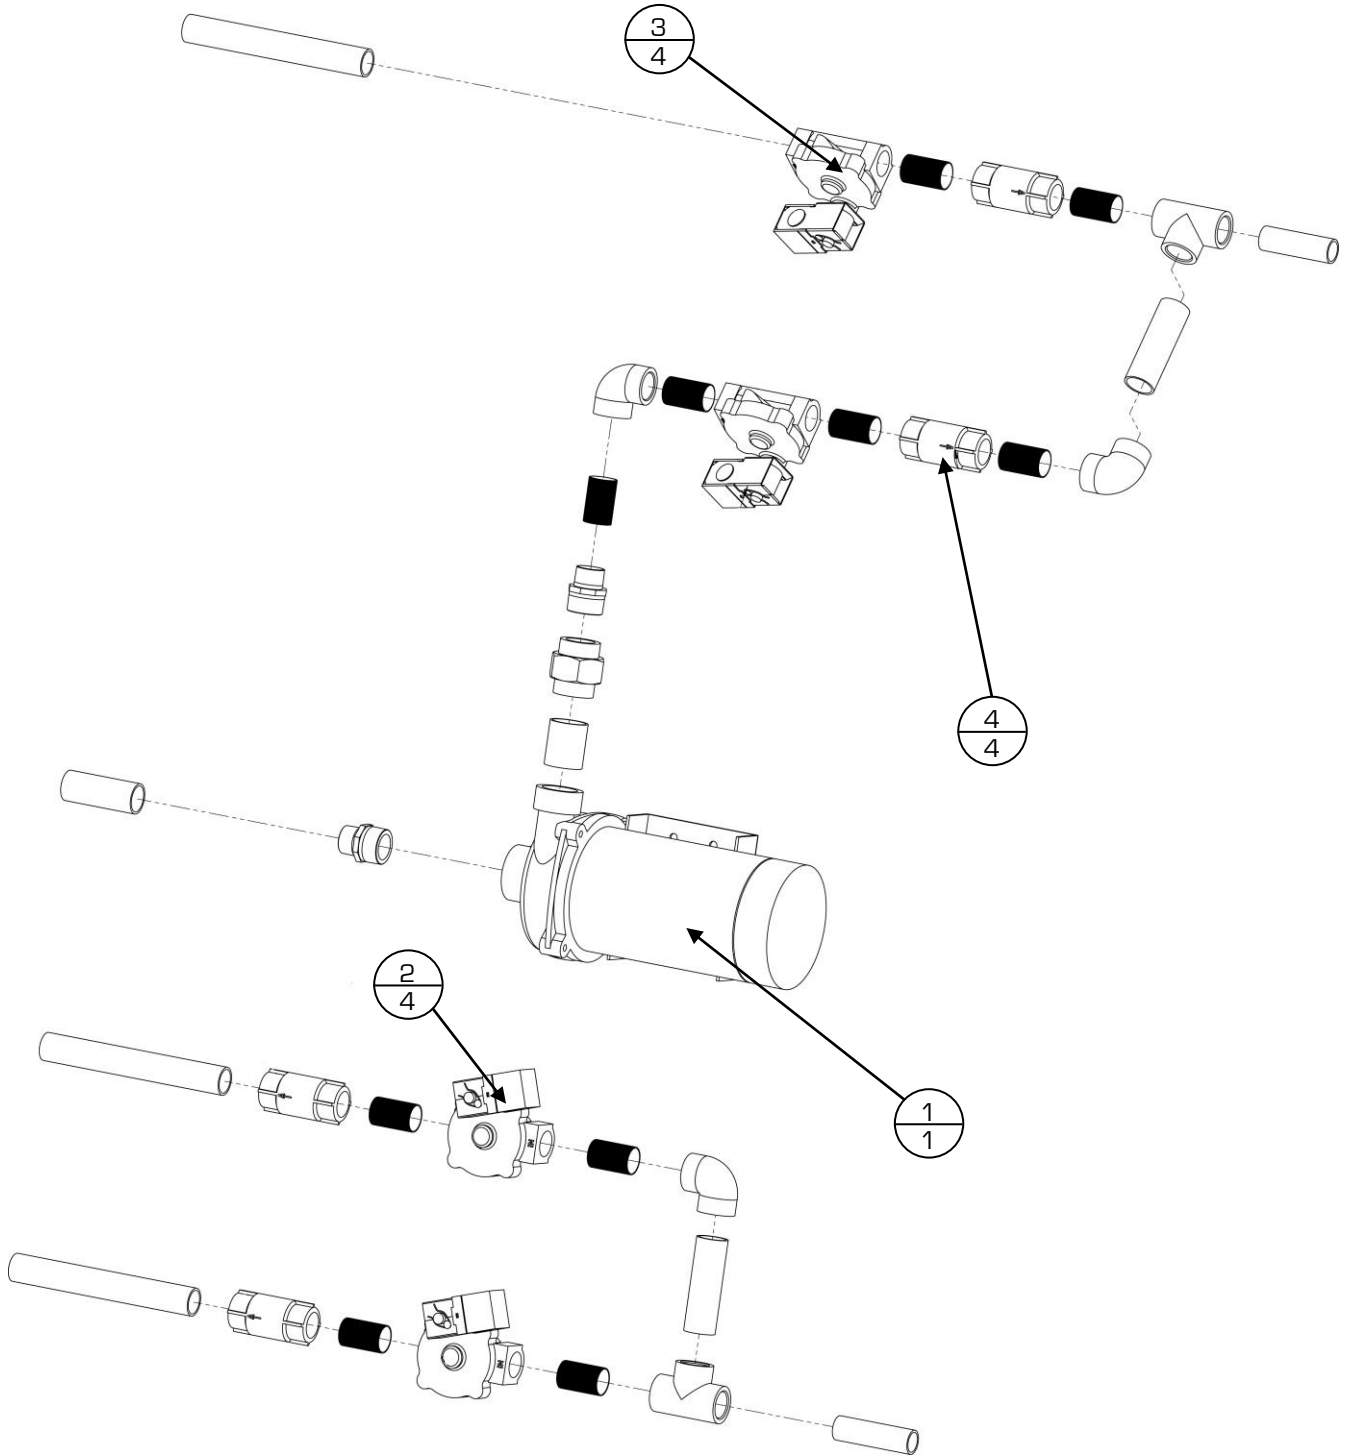


Quantity

Item #	Part #	Description
1	U317	1 HP Circulation Pump with Brass Impeller
2	S105	120v Water Solenoid Coil
3	S641	1" Solenoid Valve
4	D365	1" Brass Spring THR Check Valve


*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

Berkeley Pump Parts

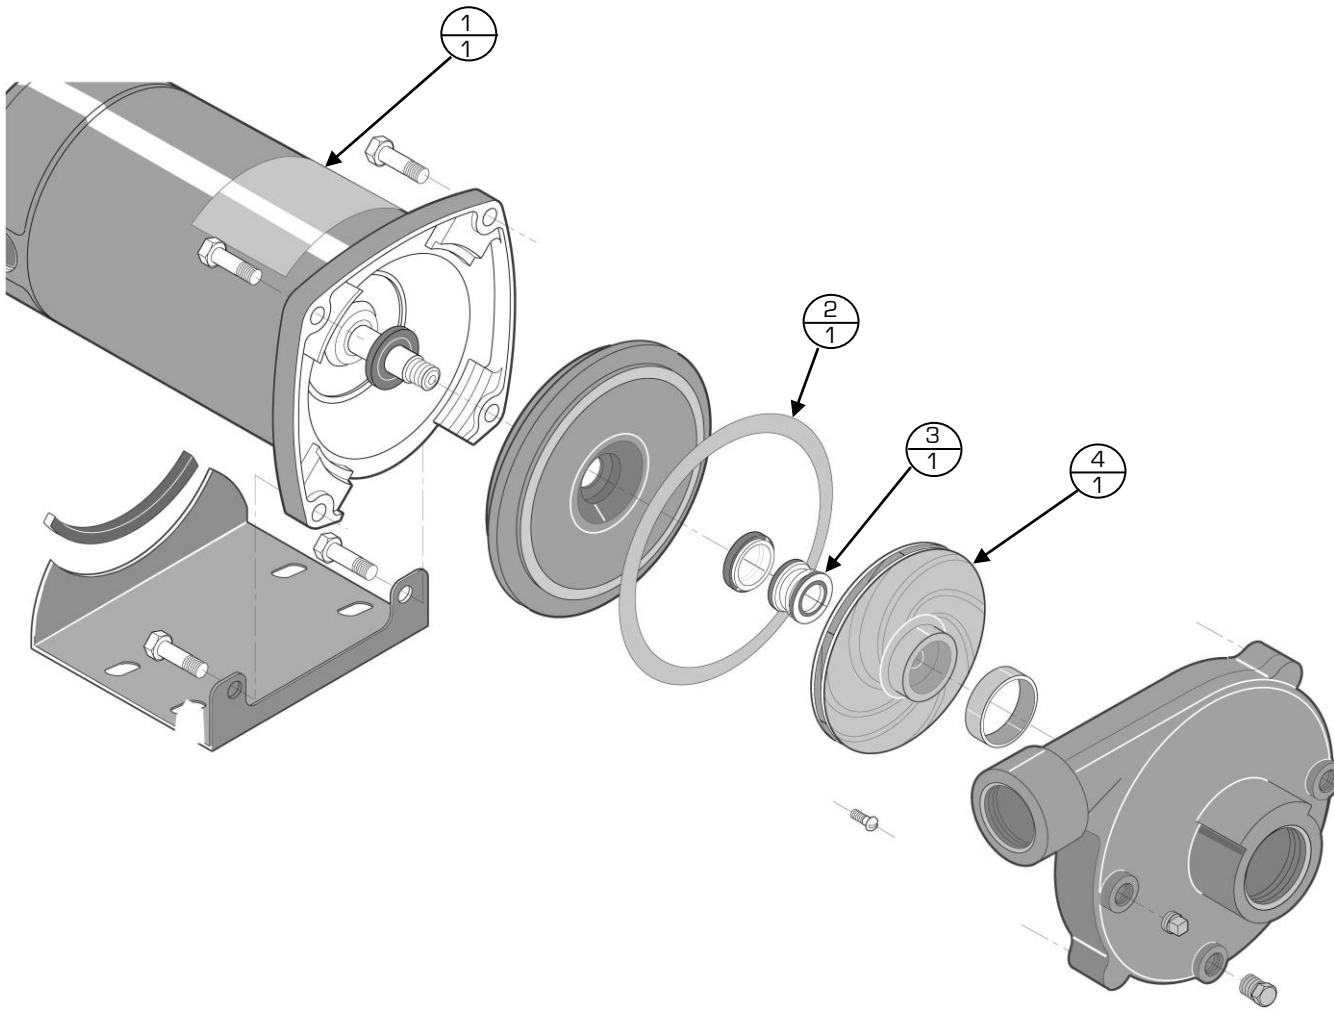


Item #	Part #	Description
1	C479	1 HP Berkeley Pump Motor Only
2	U334	Gasket Volute
3	R495	Shaft Seal
4	G458	Brass Impellor

Control Center Pump with Gould Pump

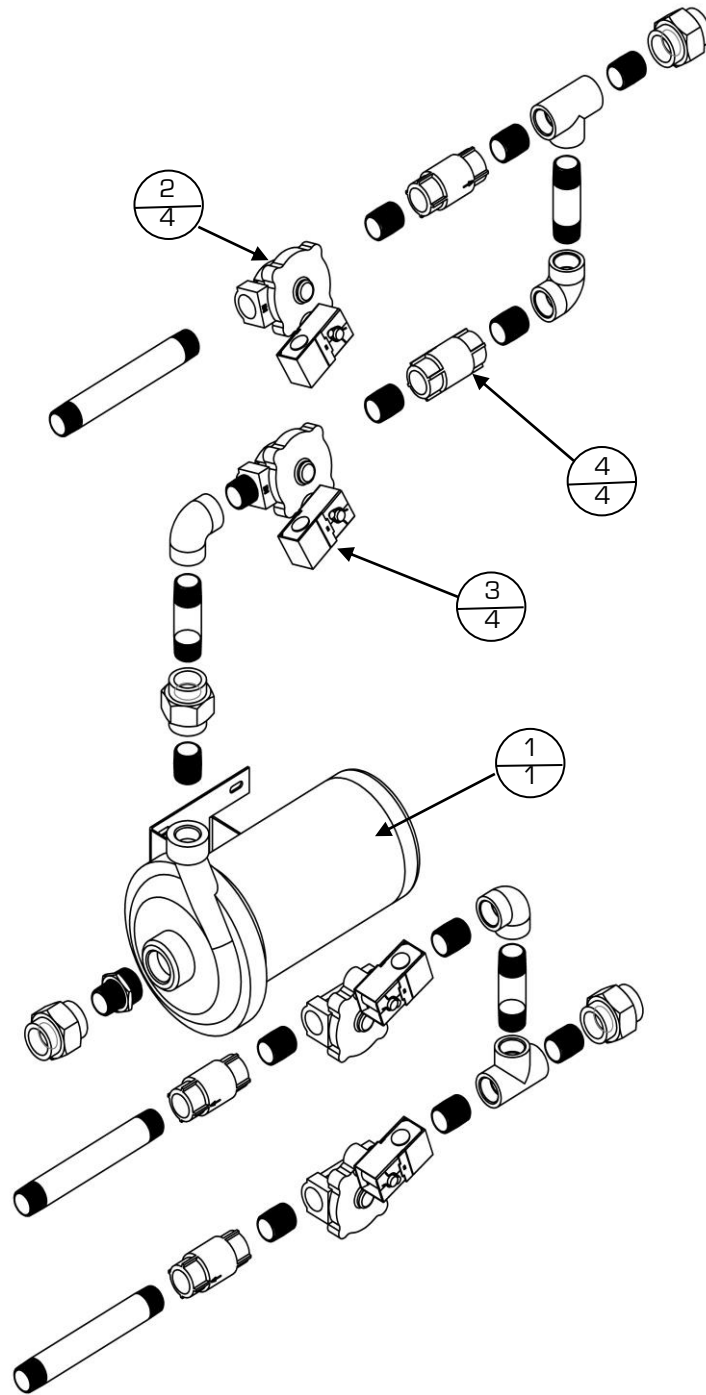


Item #	Part #	Description
1	Y546	1HP Gould Pump with SS Impeller
2	S641	1" Solenoid Valve
3	S105	120v Water Solenoid Coil
4	D365	1" Brass Spring THR Check Valve

Gould Pump Parts

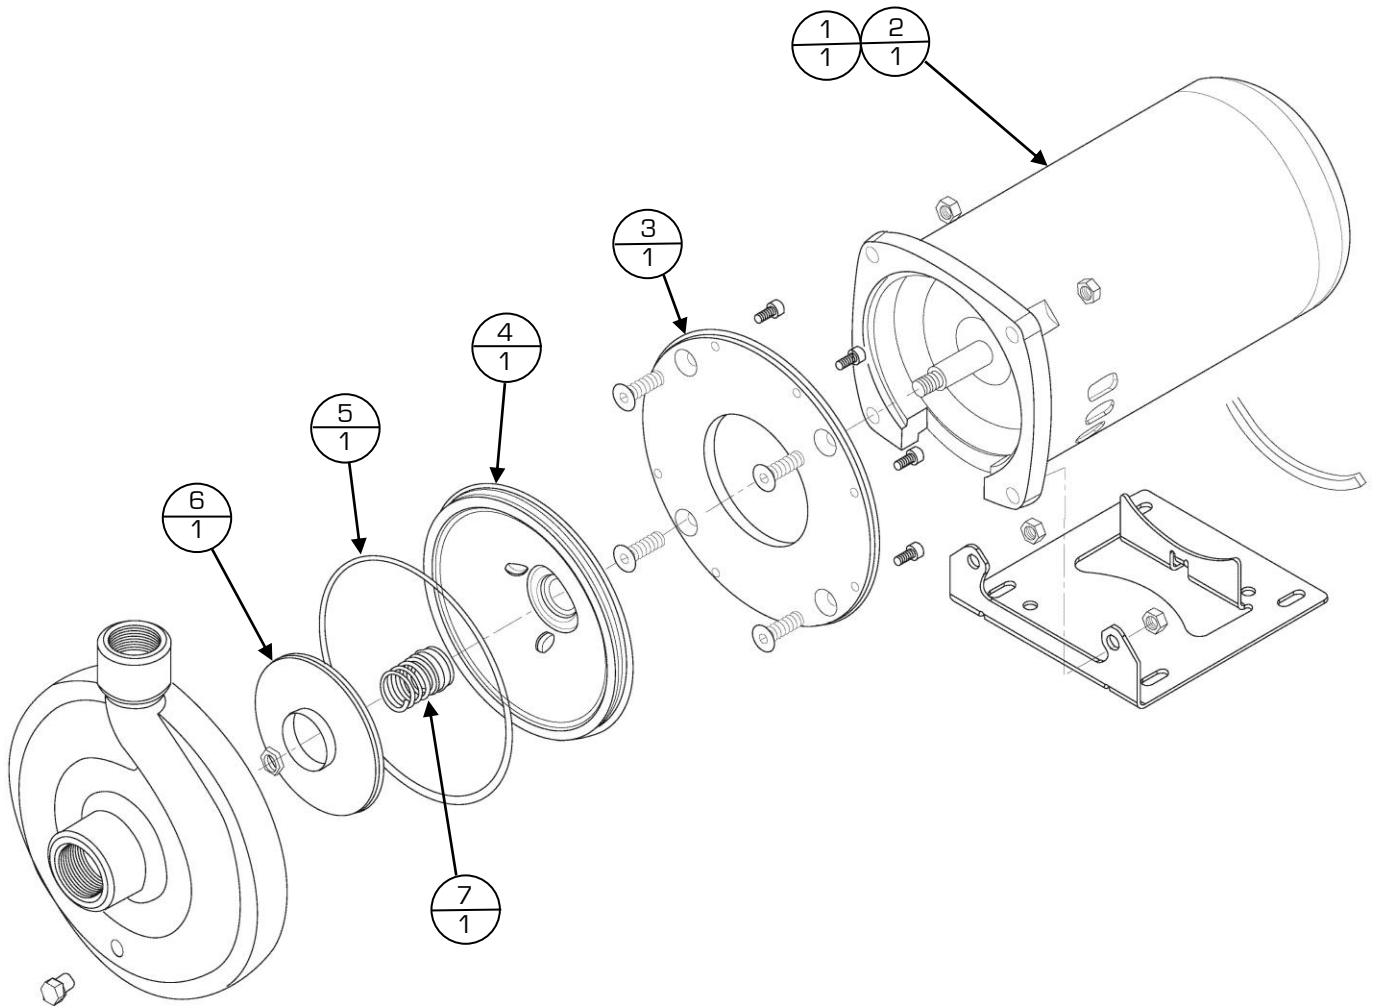

Item #	Part #	Description
1	Z311	Goulds 1hp 3ph ODP MCC Motor
2	F566	Goulds 1hp 1ph ODP MCC Motor
3	L470	Motor Adaptor Goulds 1hp MCC Pump
4	R618	Seal Housing 1hp Goulds MCC Pump
5	N225	O-ring, Casing Viton 1hp Goulds MCC Pump
6	F285	Impeller, 4.75" dia, SS Goulds MCC Pump
7	Q159	Mechanical Seal C/S?Viton 1hp Goulds MCC Pump


CIP Box

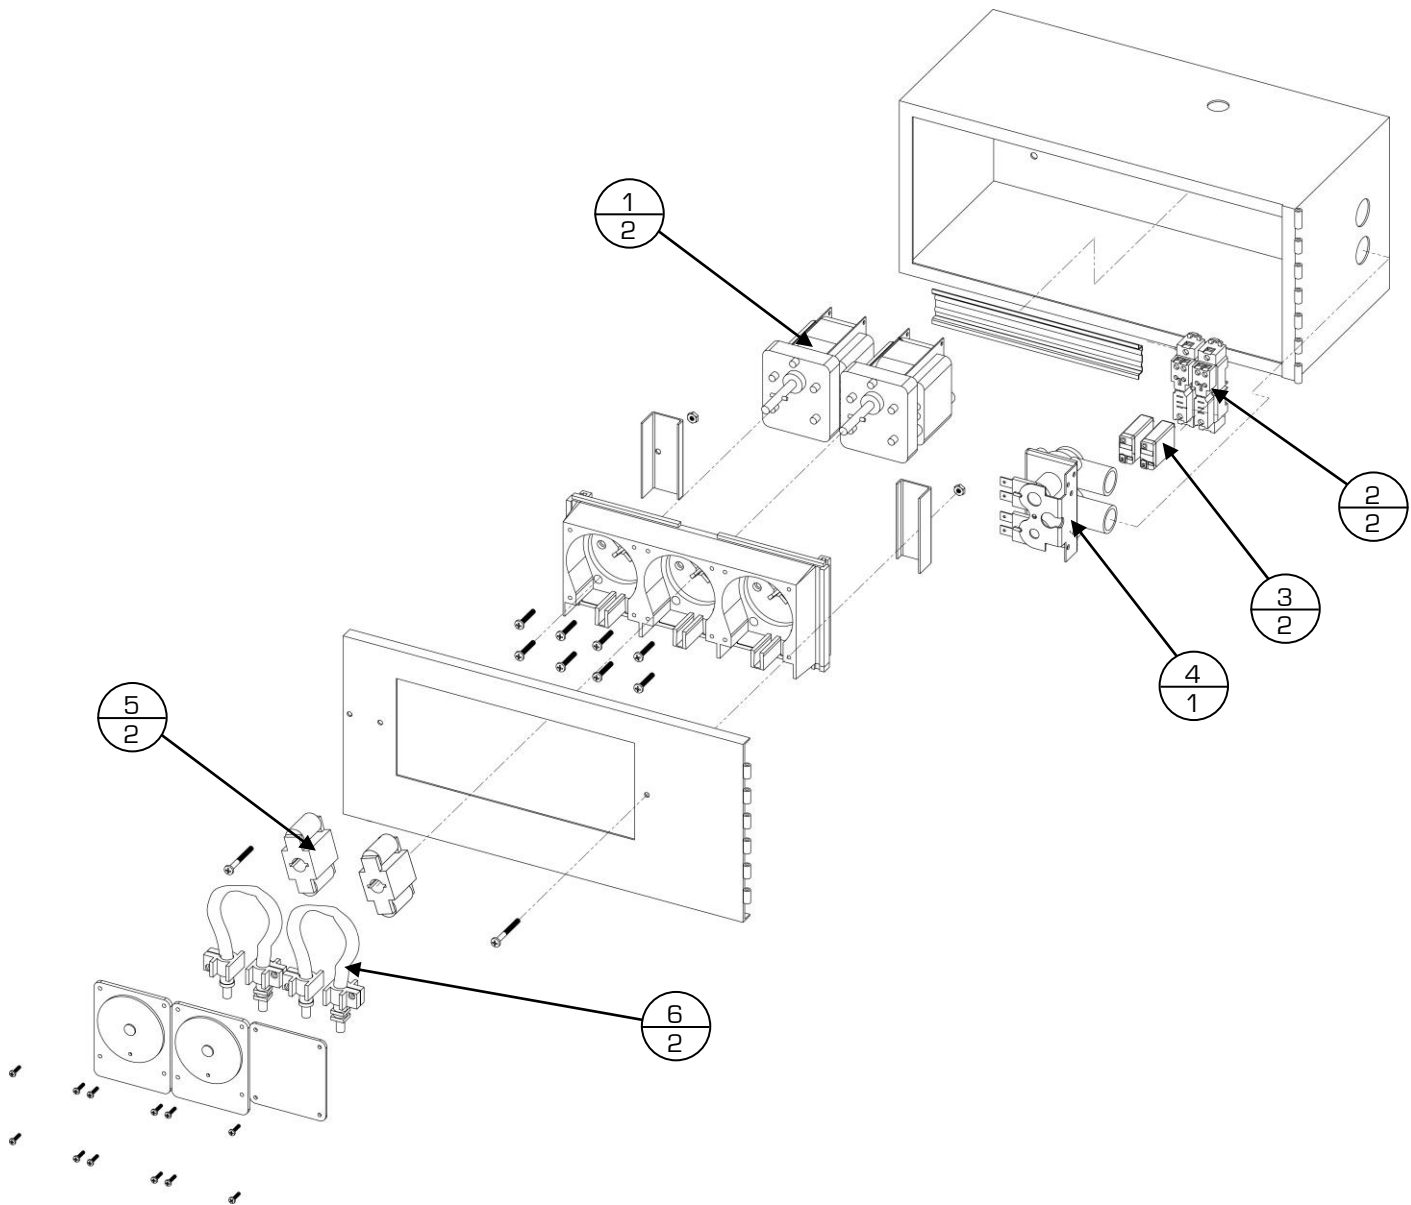

Item #	Part #	Description
1	J652	Hi Speed Motor 120v
2	F602	5-Pin Relay Base
3	J566	120V 5-Pin Relay
4	G873	Water Valve
5	P366	Roller Assembly
6	M263	Bender Squeeze Tube Assy

* Items not listed are considered non-common replacement parts and can be custom ordered upon request.


Control Center – Included Accessories

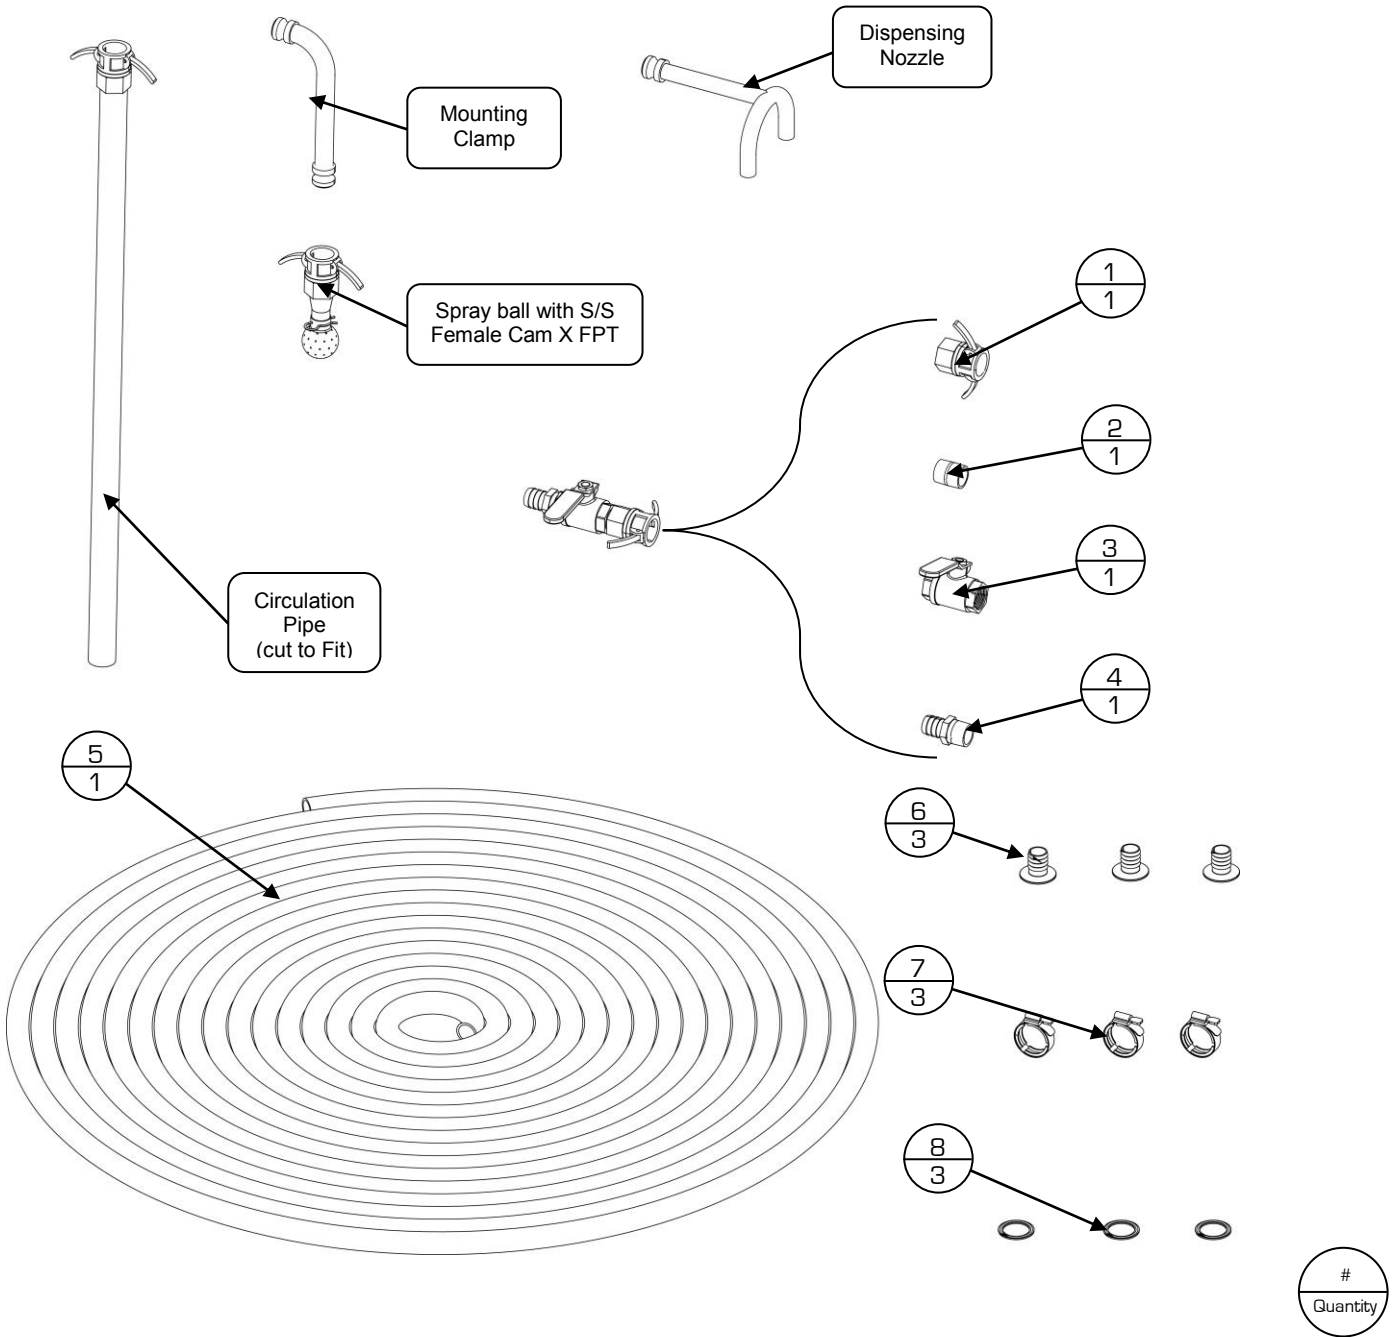


Item #	Part #	Description
1	O455	1" S/S Female Cam X FPT
2	N646	1" X CL Galv Nipple
3	Q895	1" SS THR Ball Valve
4	V726	1" NPT X Hose Barb, SS
5	F880	1" PVC clear Suction Hose (20' included with Control Center) <i>[sold by the foot]</i>
6	O793	1" Tri-clamp X Hose Barb Fitting
7	A802	1-½" SS V Insert Clamp
8	D294	1- ½" Tri-clamp Rubber Gasket

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

Control Center - Overall Dimensions

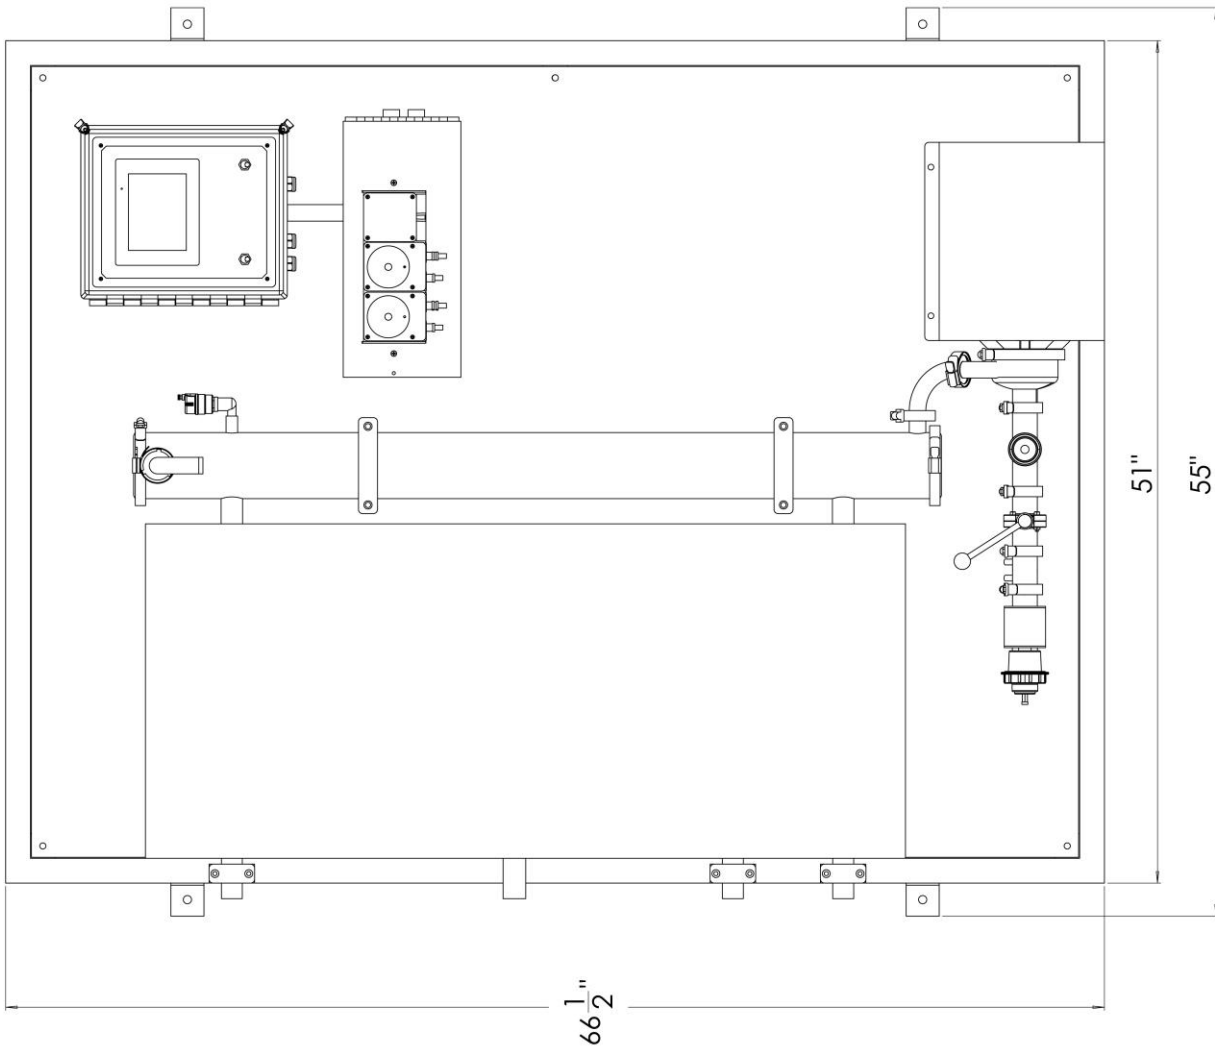

Front view

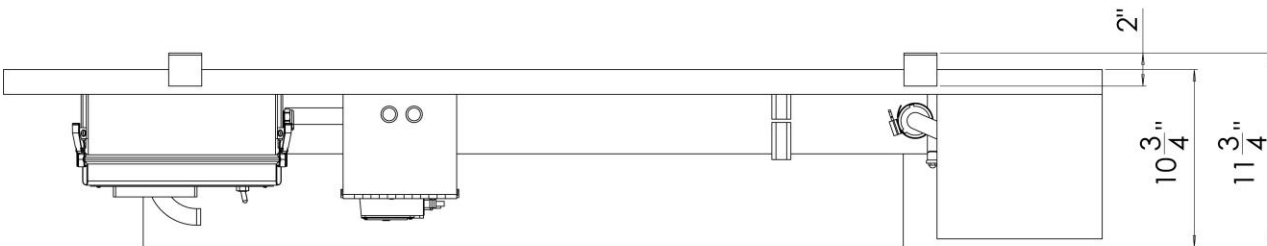


Side View

For Technical Support, to order Replacement Parts, or for questions about other products,
please contact your local dealer.



Calf Milk **Pasteurizer**


by Westwaard

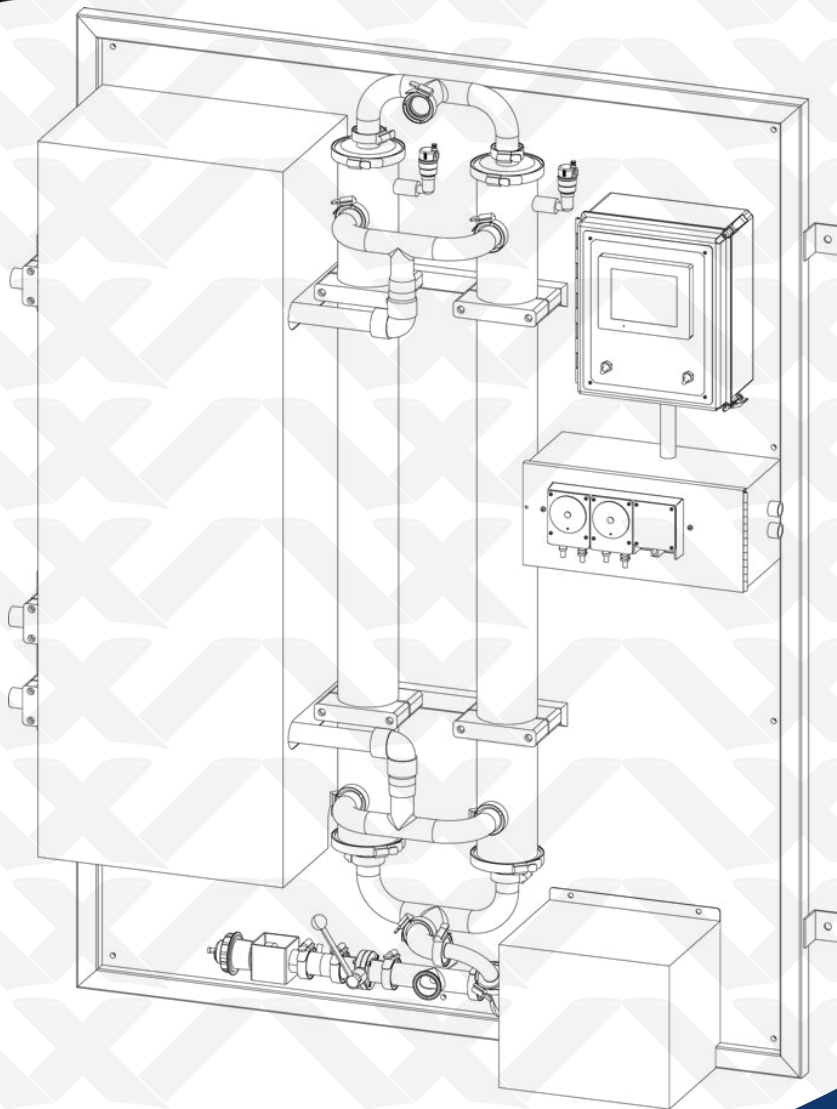

**Parts Manual
High Capacity Control Center
(WPLGCCHC)**

WESTWAARD
FABRICATORS for DARITECH



Control Center - Heat Exchanger

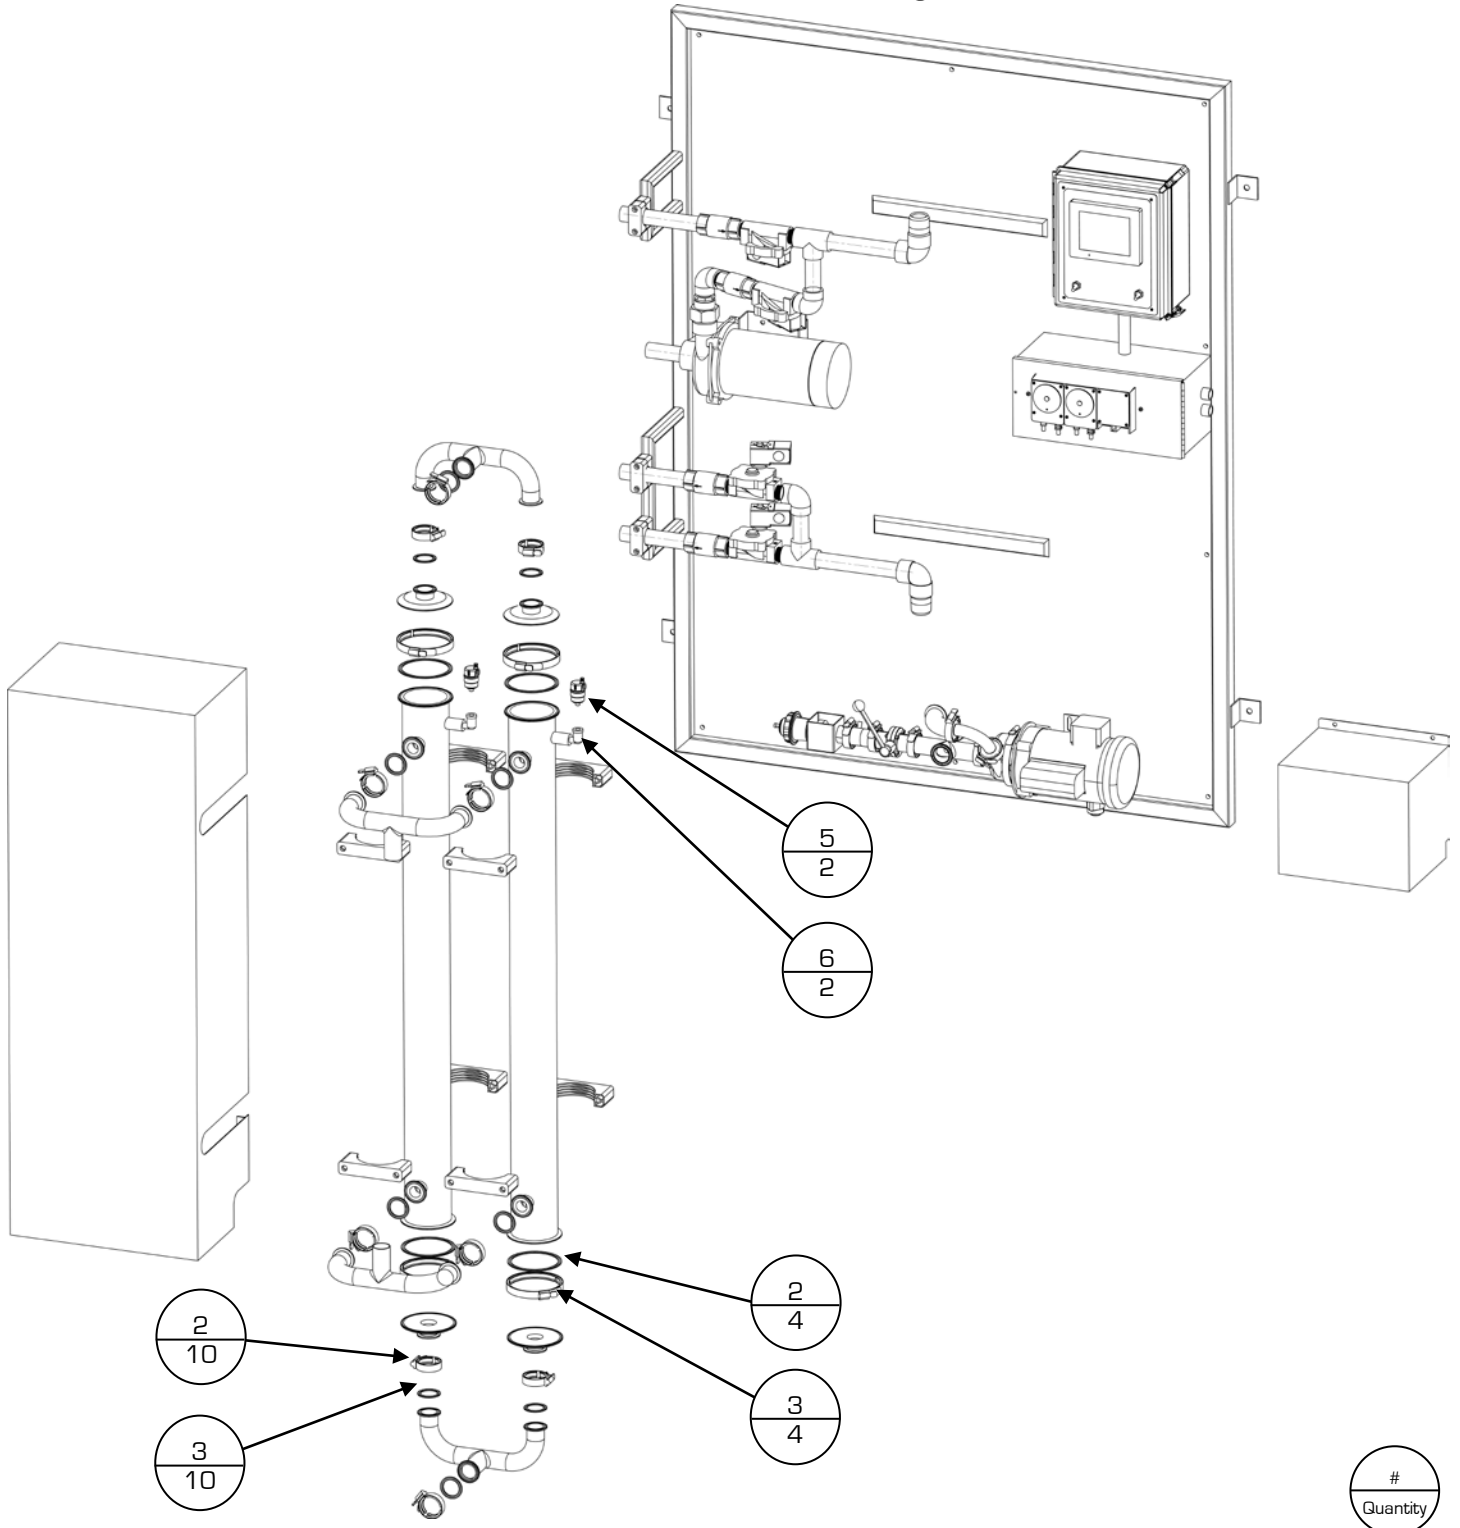

Item #	Part #	Description
1	G844	4" SS V Insert Clamp
2	X459	4" Triclover Gasket
3	D294	1 1/2" Tri-clamp Rubber Gasket
4	A802	1 1/2" SS V Insert Clamp
5	K212	90° Galv ST
6	N422	1/4" Automatic Float Vent

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.


Control Center - Motor Parts

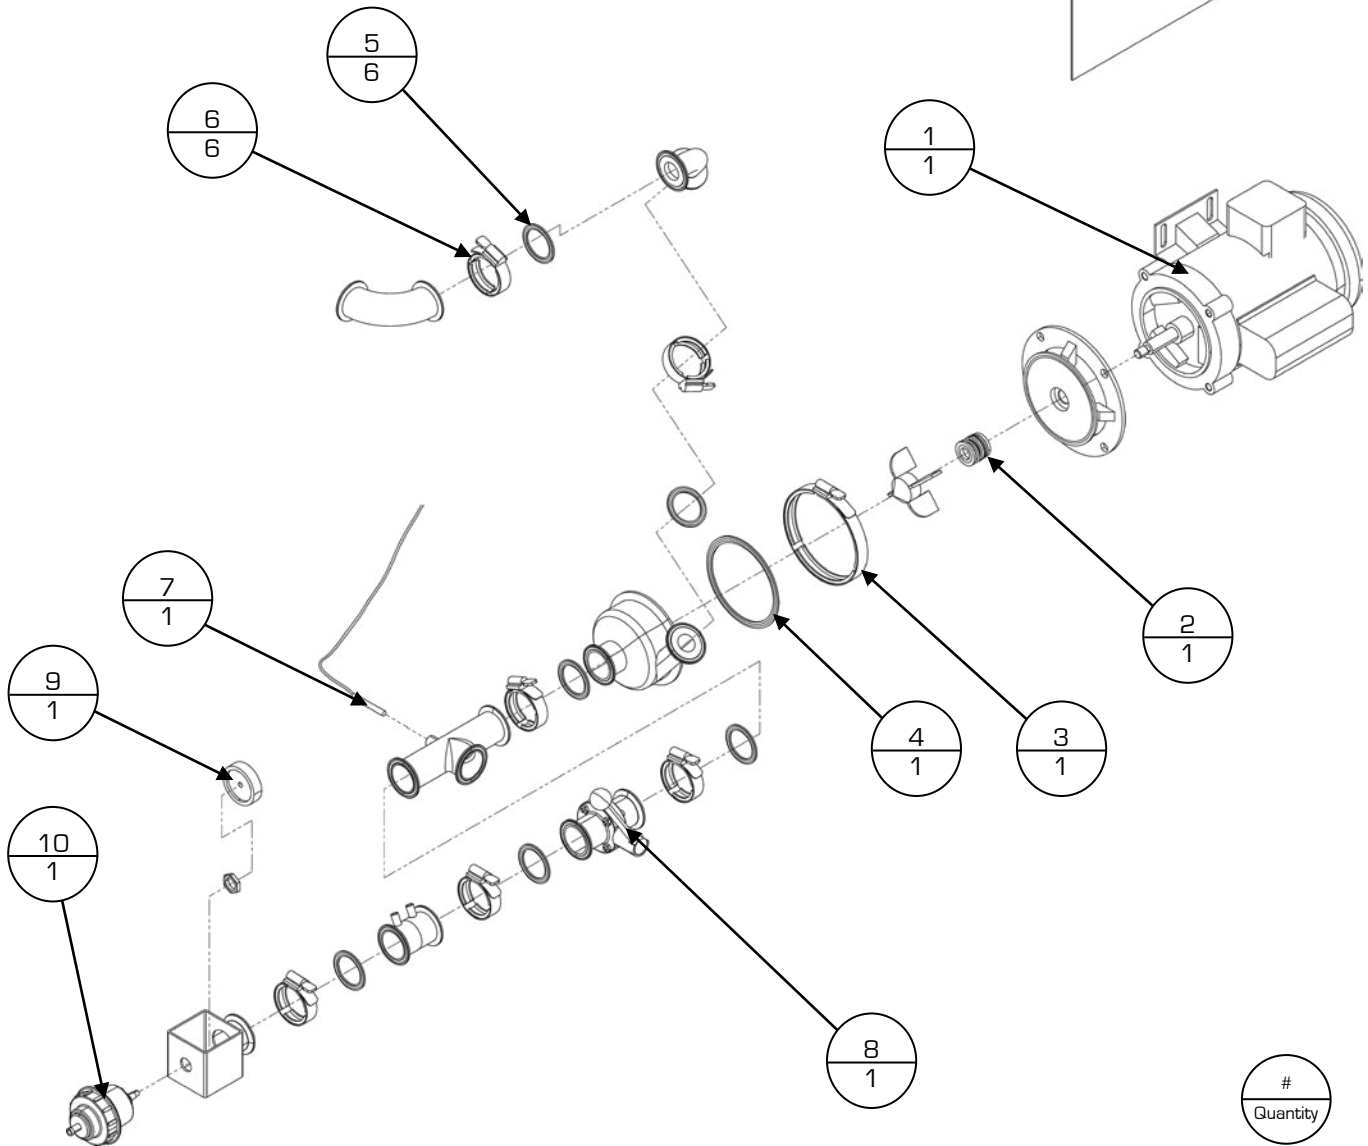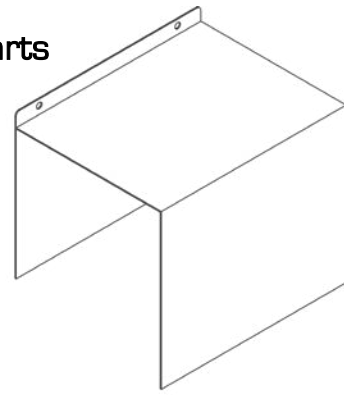

Item #	Part #	Description
1	B575	1.5 HP, 3450 RPM, 1 PH, 56J, TEFC
2	U600	STA-Rite Seal PKG.
3	G844	4" SS V Insert Clamp
4	X459	4" Triclover Gasket
5	D294	1 1/2" Tri-clamp Rubber Gasket
6	A802	1 1/2" SS V Insert Clamp
7	B399	RTD Sensor
8	X879	1 1/2" Clamp SS Butterfly Valve
9	B757	Measure / Drain Valve Cap
10	U859	Auto Drain Valve Assy

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.


Control Center - Pump Parts

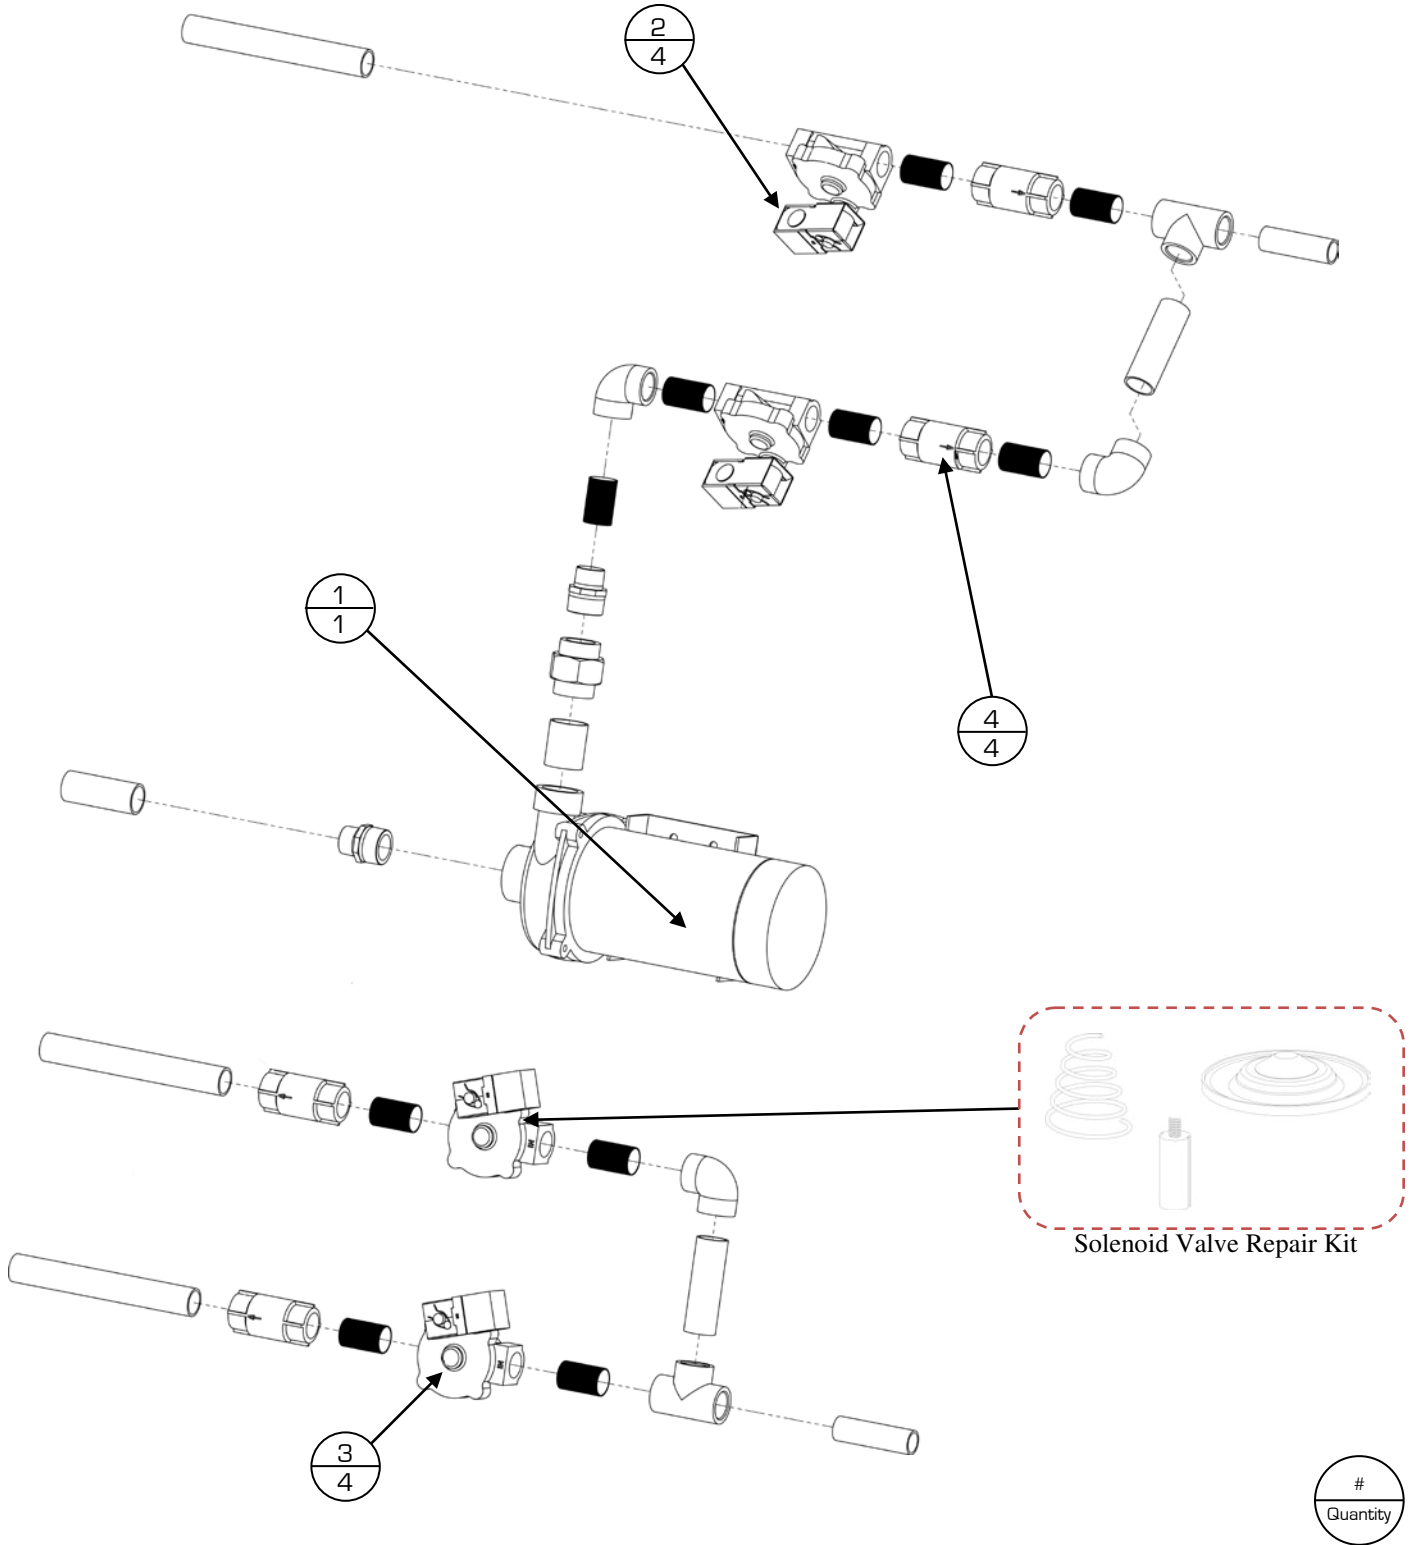

Item #	Part #	Description
1	Q646	1.5 HP Circulation Pump with Impeller
2	V601	120v Water Solenoid Coil
3	B174	1-1/4" Solenoid Valve
	R224	Solenoid Valve Repair Kit
4	D166	1-1/4" Brass Spring THR Check Valve

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

Control Center – CIP Box

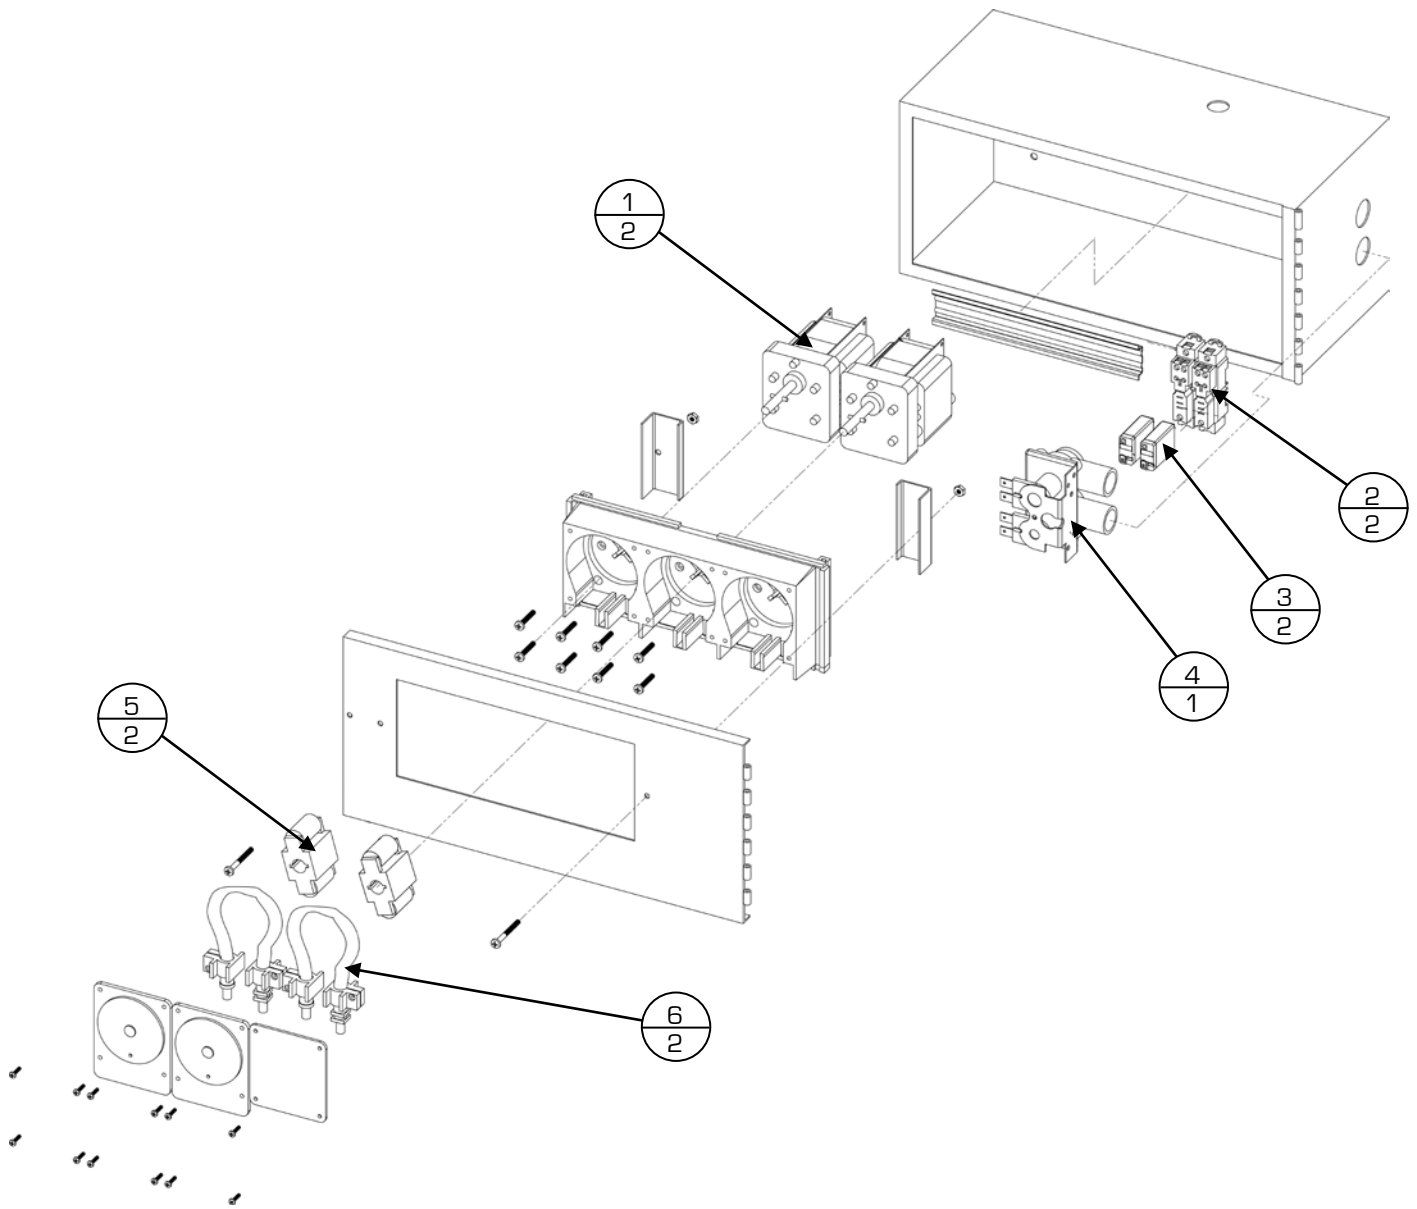


Quantity

Item #	Part #	Description
1	J652	Hi Speed Motor 120v
2	F602	5-Pin Relay Base
3	J566	120V 5-Pin Relay
4	G873	Water Valve
5	P366	Roller Assembly
6	M263	Bender Squeeze Tube Assy

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.


HC Control Center – Included Accessories

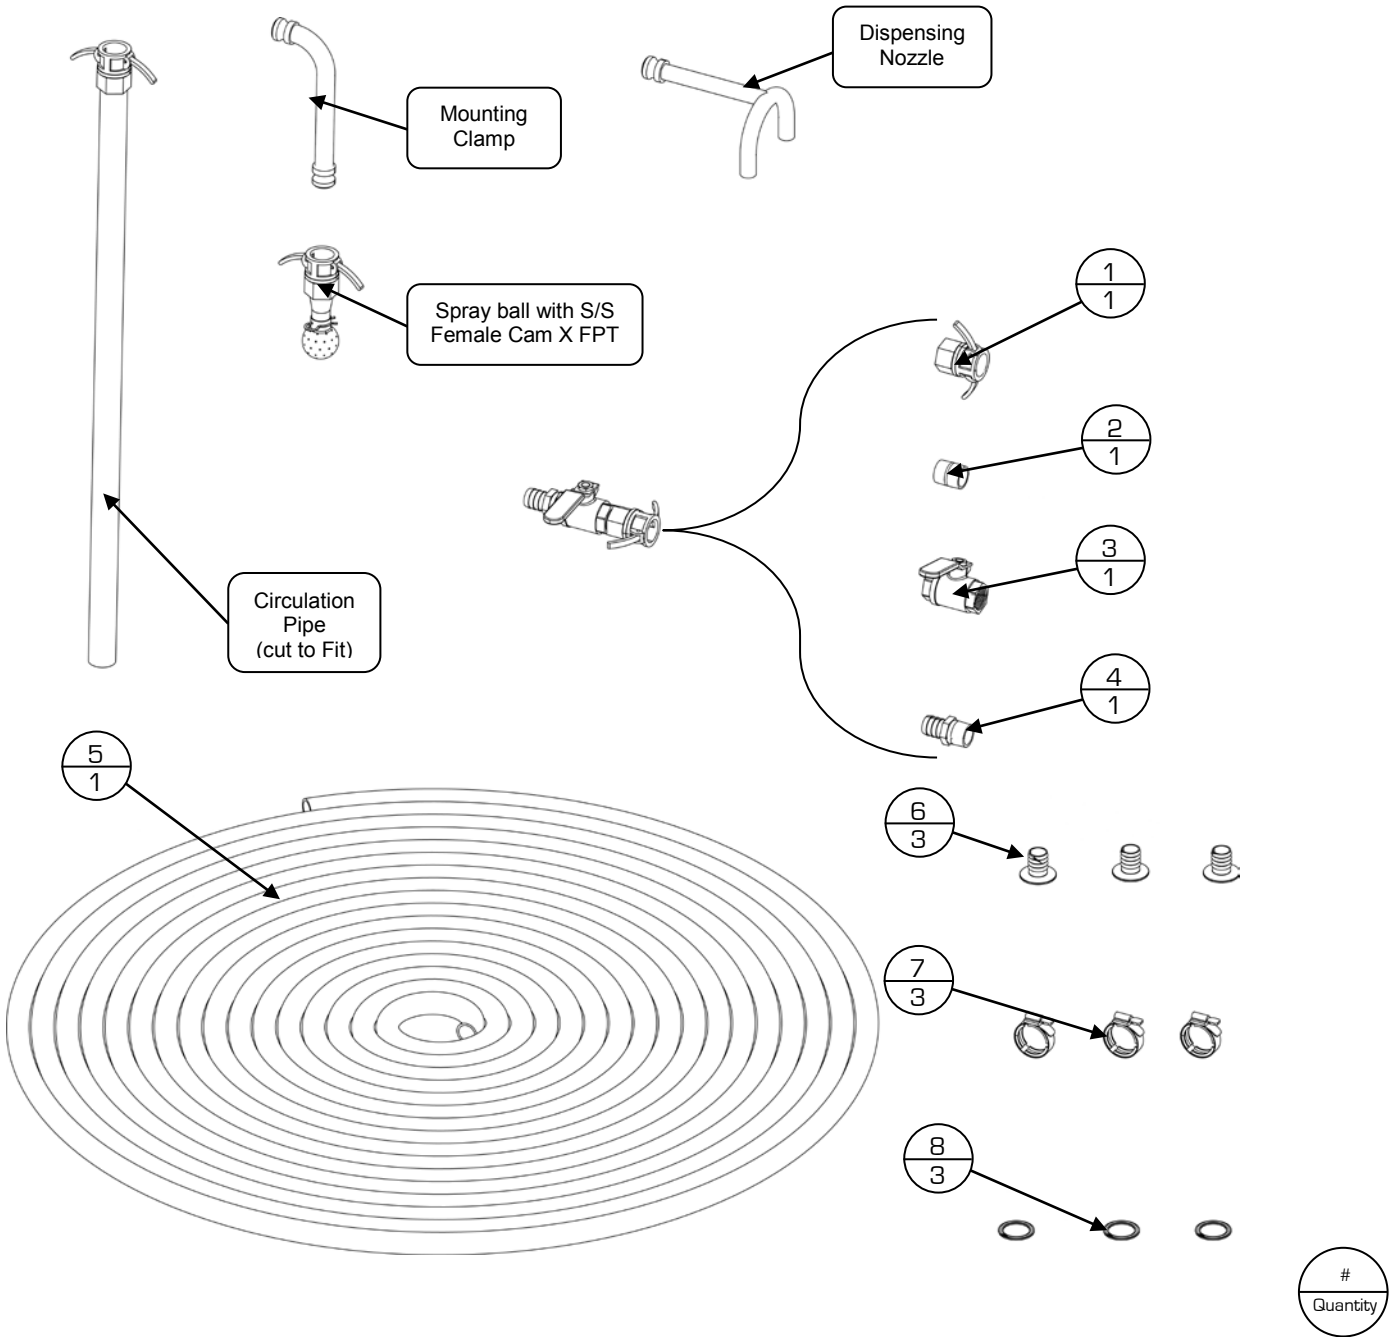

Item #	Part #	Description
1	O455	1" S/S Female Cam X FPT
2	N646	1" X CL Galv Nipple
3	Q895	1" SS THR Ball Valve
4	V726	1" NPT X Hose Barb, SS
5	F880	1" PVC clear Suction Hose (20' included with Control Center) <i>(sold by the foot)</i>
6	O793	1" Tri-clamp X Hose Barb Fitting
7	A802	1-1/2" SS V Insert Clamp
8	D294	1- 1/2" Tri-clamp Rubber Gasket

*Items not listed are considered non-common replacement parts and can be custom ordered upon request.

HC Control Center - Overall Dimensions

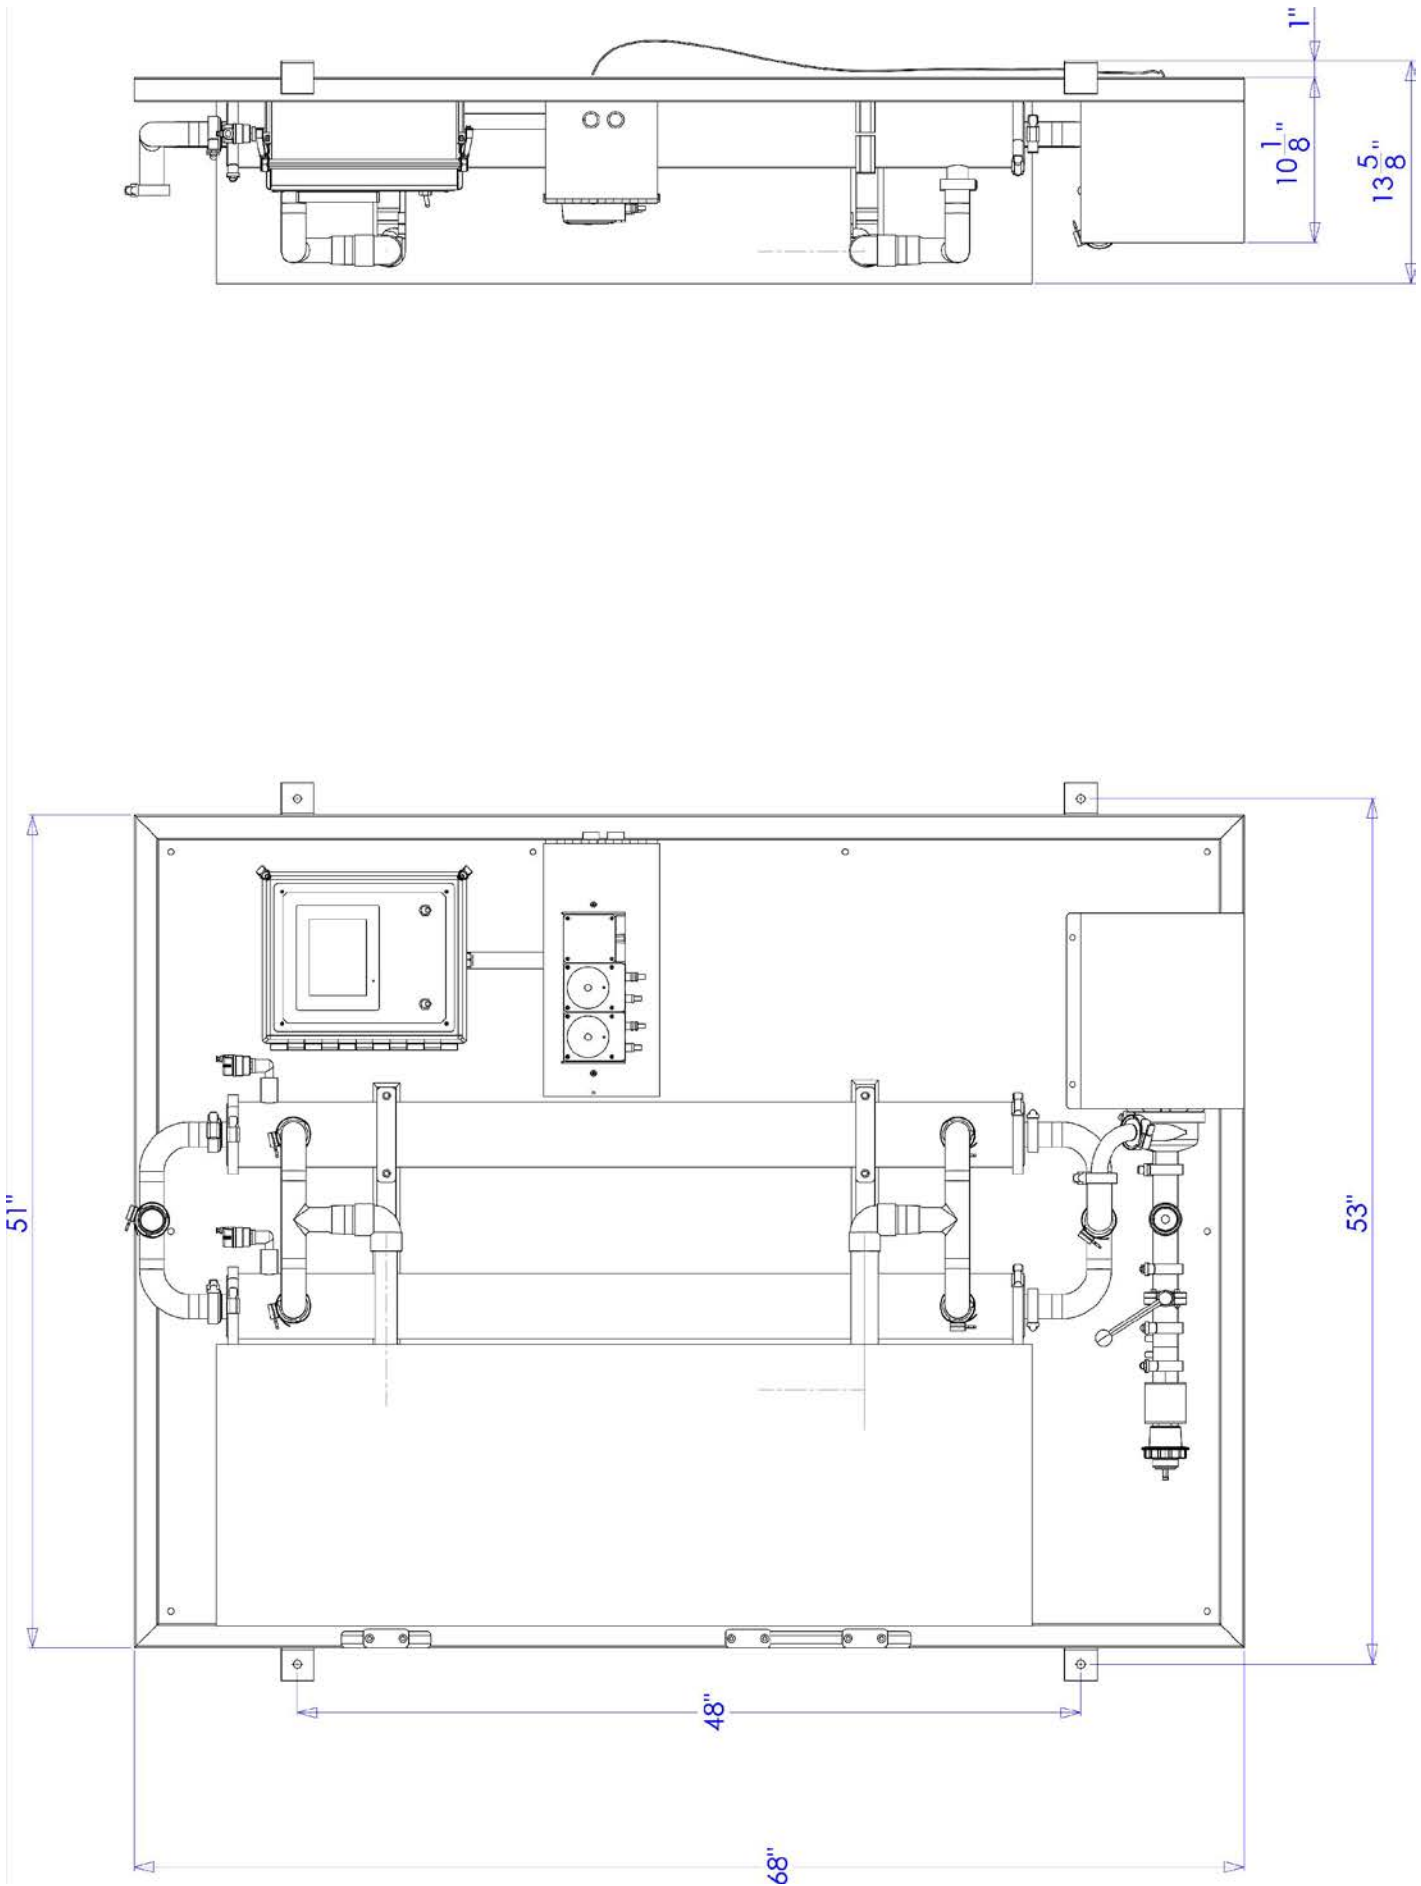

For Technical Support, to order Replacement Parts, or for questions about other products,
please contact your local dealer.

