

# *Flush* VALVES

BY DARITECH







## Conventional Flush Valves

Made of hot-dipped galvanized steel featuring a robust and reliable air bag system, stainless steel fasteners and a 3/8" thick lid for 12" models and 1/2" thick lid on 15" models. Easy to maintain and consistent, reliable flow.

### Pop-Up Head

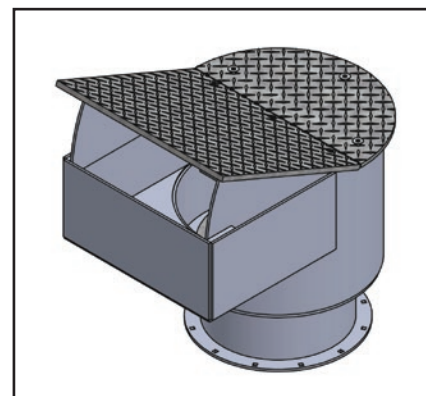


12" Model #V757

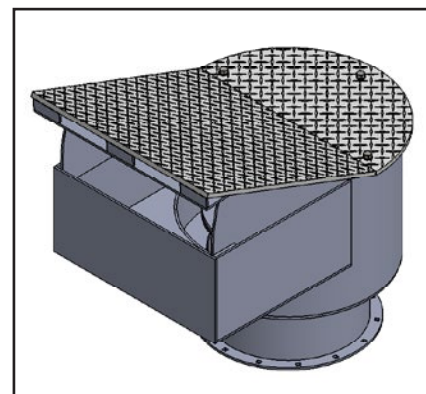


15" Model #X284

### Curb Mount

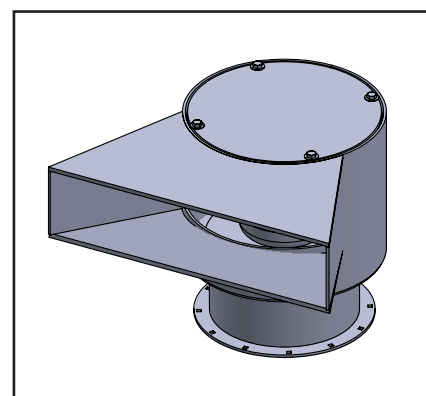

12" Model #L807

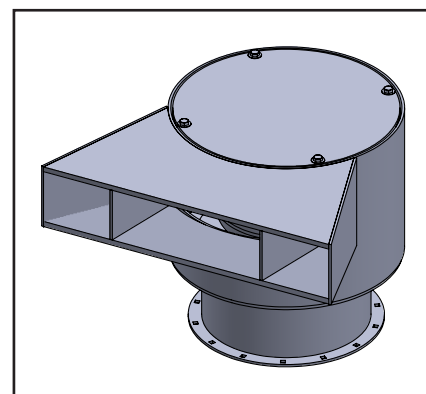

15" Model #M274


**NEW!!!**

# ROBOT Flush


BY DARITECH  
PATENT PENDING



**D**aritech now offers a complete flush system for small areas around robot milking equipment. Each main valve can feed three to eight small flush valves that feature interchangeable discs to precisely control flow and direction. Keep your waiting areas, cross overs, sort and fetch areas consistently clean with reduced labor.

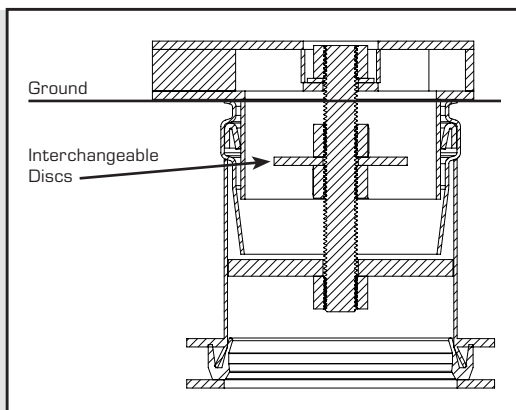


6" Model #M384

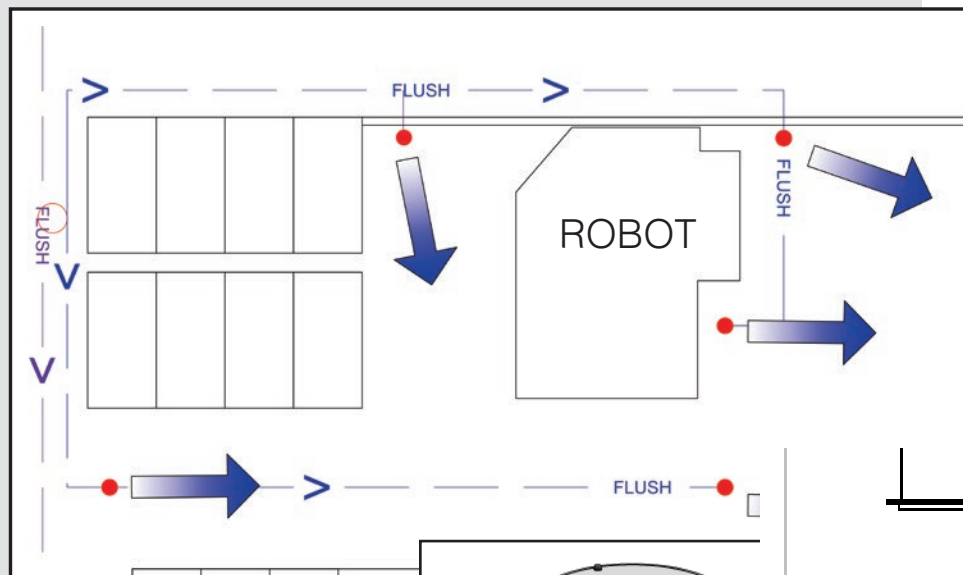


## MINI BIOLYNK

Discover how this system works with a scrape dairy to provide quality flush water! See Daritech's MiniBioLynk brochure for more information.


*Left: Typical robot flush system design. Dashed line indicates main feed valve flow, red dots are flush*

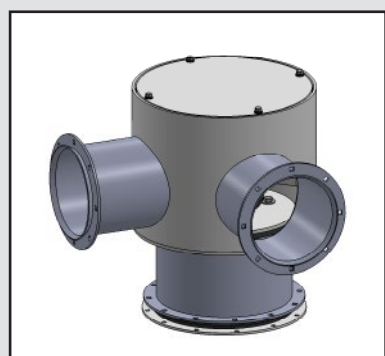

Short Model #Z364  
12" In, 2" - 8" Out

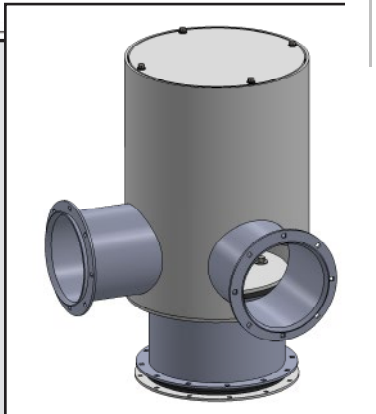


Tall Model #R242  
12" In, 8" Out

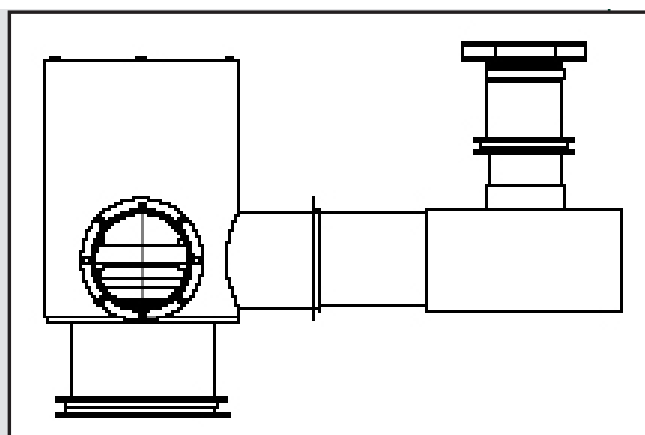





## Daritech Specialty Valves

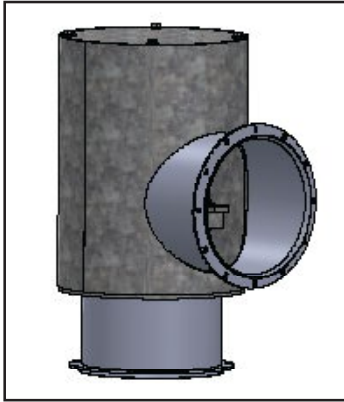

**Flume Feed Valves**  
12" Model #Z584  
15" Models available

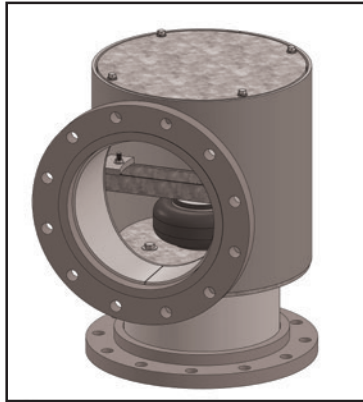

**Above Ground Manifolds**  
Available in various sizes,  
built to suit.



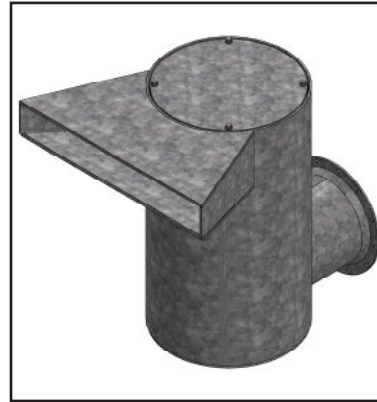


Custom valve configurations  
to meet your dairy's needs.



## DT Fresh Water Pop-Up Valve

Stainless steel and plastic construction for consistent and reliable performance with 360, 180 or 90 degree spray patterns. Keep your parlor floors clean with easy maintenance for many years of reliable operation.

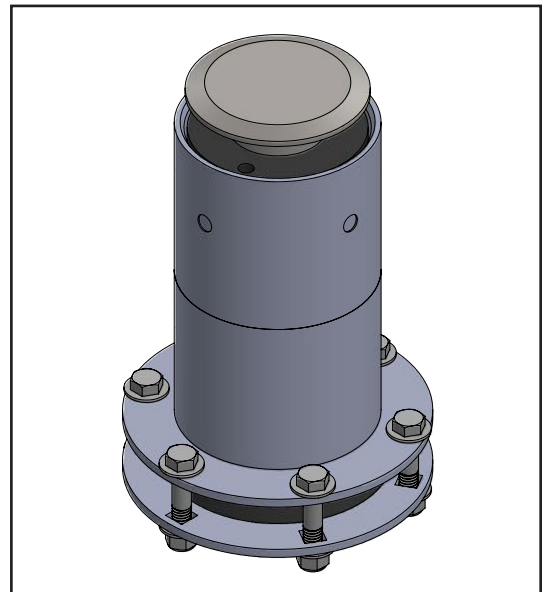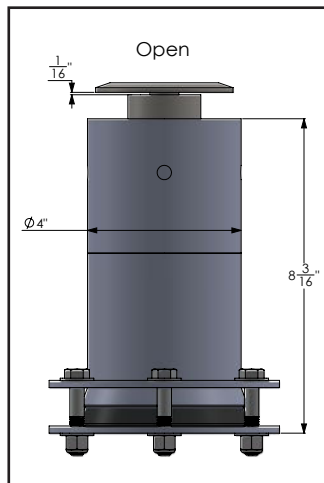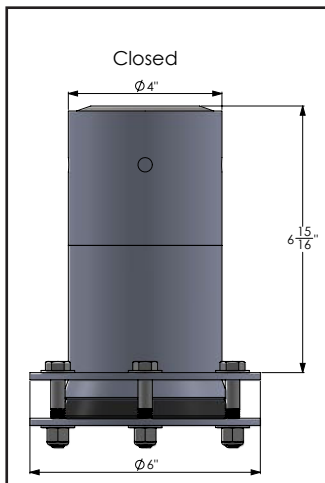

*Mounts to a 3" IPS riser with included compression fitting. Operates at 40 - 70 psi providing 20 - 35 gpm with a 12' spray radius.*